

INTUITIVE NAVIGATION IN ELECTRICAL NETWORKS

COMPREHENSIVE INSTRUMENTS
FOR MEASUREMENT AND
MONITORING OF POWER
SYSTEMS



SINEAX AM-SERIES

SINEAX AM1000 • SINEAX AM2000 • SINEAX AM3000



Panel installation devices for
a clear view into electrical
networks



The SINEAX AM-SERIES devices are compact instruments to measure and monitor in heavy current grids. They excel in display quality and intuitive operation. The devices provide a wide range of functionalities which may even be extended by optional components. They are connected to the process environment by communication interfaces, via digital I/Os, analog outputs or relays. The devices have been designed for universal use in industrial plants, building automation or in energy distribution.

Nominal voltages of up to 690 V and measurement category CATIII can be directly connected in low voltage systems. The universal measuring system permits the direct use of the devices in any type of grid, from single-phase mains through to 4-wire unbalanced load systems. The AM series devices may be completely adapted to requirements on site via TFT display. Versions with an Ethernet interface permit webpage configuration without any special software.

CLEAR

High resolution, colour TFT display for the pin-sharp indication of measured data

Consistently visible status information (alarms, password protection, data recording, time/date and much more)

Clear design

INTUITIVE

Easy device operation with language-specific plain text menu guidance

Topical arrangement of measured data information for quick access to desired data

Service area for maintenance and commissioning

MULTIFUNCTIONAL

Varied monitoring options via limit values and their logical linkage

Central alarm function via display

Alarm list with plain-text information for a quick plant status overview

FLEXIBLE

Universal measuring inputs for any type of grid

Freely selectable mean value and meter measuring variables

Configurable access authorisation

SCALABLE

Combinable device version (functionality, interfaces, I/Os, power supply)

Front dimension options (96x96 or 144x144mm)

Integration as a standard object into the SMARTCOLLECT software



	AM1000	AM2000	AM3000
Input channels voltage / current Measurement interval [#cycles]	3 / 3 10/12 (50/60Hz); 1/2	3 / 3 10/12 (50/60Hz)	4 / 4 10/12 (50/60Hz); 1/2
MEASURED VALUES			
Instantaneous values	▪	▪	▪
Extended reactive power analysis	▪	▪	▪
Imbalance analysis	▪	▪	▪
Neutral current	calculated	calculated	measured / calculated
Earth wire current (calculated)	--	--	▪
Zero displacement UNE	calculated	calculated	measured / calculated
Energy balance analysis	▪	▪	▪
Harmonic analysis	▪	▪	▪ (incl. phase angle)
Operating hour counters device / general	1 / 3	1 / –	1 / 3
Monitoring functions	▪	▪	▪
Visualisation curve shape U/I	–	–	▪
MEASUREMENT UNCERTAINTY			
Voltage, current	±0,2%	±0,2%	±0,1%
Active, reactive, apparent power	±0,5%	±0,5%	±0,2%
Frequency	±10mHz	±10mHz	±10mHz
Active energy (IEC 62053-21/22)	Class 1	Class 1	Class 0.5S
Reactive energy (IEC 62053-24)	Class 1	Class 1	Class 0.5S
DATA LOGGER (Option, only with Ethernet)	internal (≥2GB)	Micro SD card (≥2GB)	Micro SD card (≥2GB)
Periodic recording	▪	▪	▪
Event recording	▪	▪	▪
Disturbance recorder (with pretrigger)			
a) 1/2 cycle RMS progression U/I	≤3min.	–	≤3min.
b) Curve shape U/I [#cycles]	–	–	5/6 (pretrigger) +10/12
COMMUNICATION			
Ethernet: Modbus/TCP, web server, NTP	(option)	(option)	(standard)
RS485: Modbus/RTU	(option)	(standard)	(option)
Standard I/Os	1 dig. OUT ; 1 dig. IN/OUT	1 dig. IN ; 2 dig. OUT	1 dig. IN ; 2 dig. OUT
I/O extension modules (optional)	max. 1 module	max. 4 modules	max. 4 modules
POWER SUPPLY			
	100-230V AC/DC 24-48V DC	110-230V AC/130-230V DC 110-200V AC/DC 24-48V DC	110-230V AC/130-230V DC 110-200V AC/DC 24-48V DC
DESIGN			
Colour display	TFT 3,5" (320x240px)	TFT 5,0" (800x480px)	TFT 5,0" (800x480px)
Front dimensions	96 x 96 mm	144 x 144 mm	144 x 144 mm
Mounting depth	85 mm	65,2 mm	65,2 mm




MEASURED VALUES

MEASURED VALUE GROUP	APPLICATION
INSTANTANEOUS VALUES U, I, IMS, P, Q, S, PF, LF, QF ... Angle between voltage phasors Min/max of instantaneous values with time stamp	Transparent monitoring of present system state Fault detection, connection check, sense of rotation check Determination of grid variable variance with time reference
EXTENDED REACTIVE POWER ANALYSIS Total reactive power, fundamental frequency, harmonics $\cos\phi$, $\tan\phi$ of fundamental frequency with min values in all quadrants	Reactive power compensation Verification of specified power factor
HARMONICS ANALYSIS (ACCORDING TO EN 61 000-4-7) Total harmonics content THD U/I and TDD I Individual harmonics U/I up to 50 th	Evaluation of the thermic load of equipment Analysis of system perturbation and consumer structure
IMBALANCE ANALYSIS Symmetrical components (positive, negative, zero sequence system) Imbalance (from symmetrical components) Deviation from U/I mean value	Equipment overload protection Fault/earth contact detection
ENERGY BALANCE ANALYSIS Meters for the demand/supply of active/reactive power, high/low tariff, meters with selectable fundamental variable Power mean values active/reactive power, demand and supply, freely definable mean values (e.g. phase power, voltage, current and much more). Mean value trends	Preparation of (internal) energy billing Determination of energy consumption versus time (load profile) for energy management or energy efficiency verification Energy consumption trend analysis for load management
OPERATING HOURS 3 operating hour counters with programmable running condition (only AM1000/AM3000) Operating hours of the device	Monitoring of service and maintenance intervals of equipments

DEMAND / SUPPLY / INDUCTIVE / CAPACITIVE


The devices of the SINEAX AM-SERIES provide information for all of the four quadrants. Depending on whether the measured system is considered from a generator or consumer perspective, the interpretation of the quadrants changes: The energy formed from active power in Quadrants I+IV can then be regarded, e.g., as supplied or demanded active energy. In order to facilitate an independent

interpretation of the 4-quadrant information, the terms demand, supply as well as inductive or capacitive load are avoided in the display of data. They are expressed by stating Quadrant I, II, III or IV or a combination of these. In AM3000, the energy direction may be actively switched by selecting the generator or consumer arrow system. This inverts the direction of all currents.

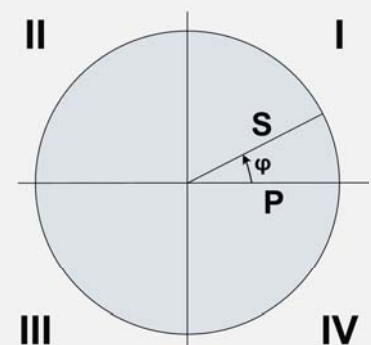



DISPLAY OPTIONS

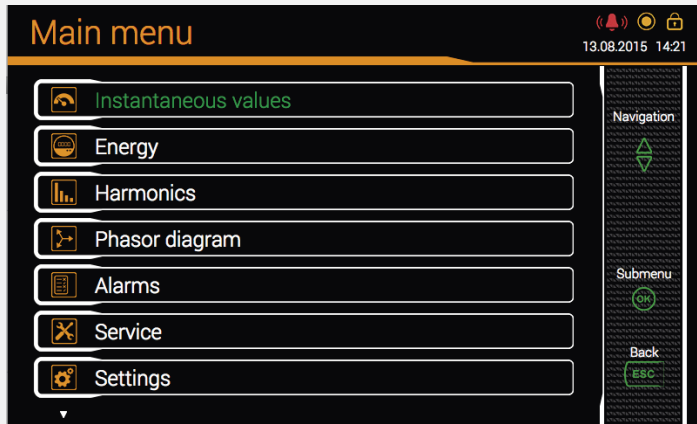


MAIN MENU - accessible via ESC

The language-specific main menu arranges the available measured data in easily comprehensible groups. AM2000 and AM3000 also provide the lateral help bar with further information concerning operation. The status bar in the top right-hand corner is always available and displays the current statuses of alarm monitoring, the password protection system and data recording as well as time / date.



INSTANTANEOUS VALUES

The instantaneous values of voltages, currents, power values, power factors as well as imbalance values and their min/max values are provided either in numbers or graphically in an x/y matrix.

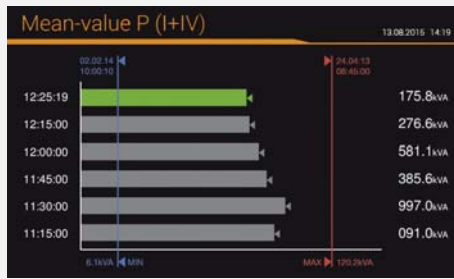


ENERGY

Contains all values required for the preparation of the energy balance, in particular, energy meters as well a mean values with progression and trend.



HARMONICS

Graphic representation of harmonics of all currents and voltages with TDD/THD. Reading option for individual harmonics.

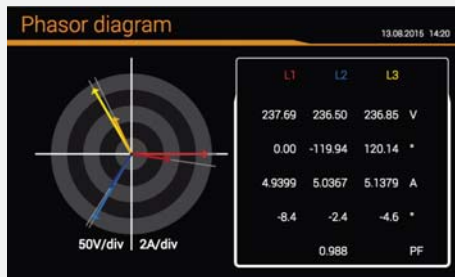

PHASOR DIAGRAM

Time-correct display of voltage and current phasors and power factors of all phases. Incorrect phase sequences false senses of rotation or reverse currents can thus be safely recognised.



ALARMS

This list displays the statuses of all monitoring functions, possibly including the status of the allocated output. The first entry is the higher-ranking collective alarm which can be reset here.

FURTHER MEASURED VALUE DISPLAYS

Only AM3000 displays the curve shape of voltages and currents in addition.



MONITORING AND ALARMS


The instruments of the AM series support the on-site analysis of acquired measured data in order to initiate directly immediate or delayed measures without involving a separate control. This facilitates the protection of equipment and also monitoring of service intervals.

The following items are available:

- 12 limit values
- 8 monitoring functions with 3 inputs each
- 1 collective alarm as a combination of all monitoring functions
- 3 operating hour counters with definable running conditions

The available digital outputs may be used directly for the transmission of limit values and monitoring functions as well as the resettable collective alarm.

A text may be allocated to each monitoring function which is used both for the alarm list and the event entries in the datalogger.

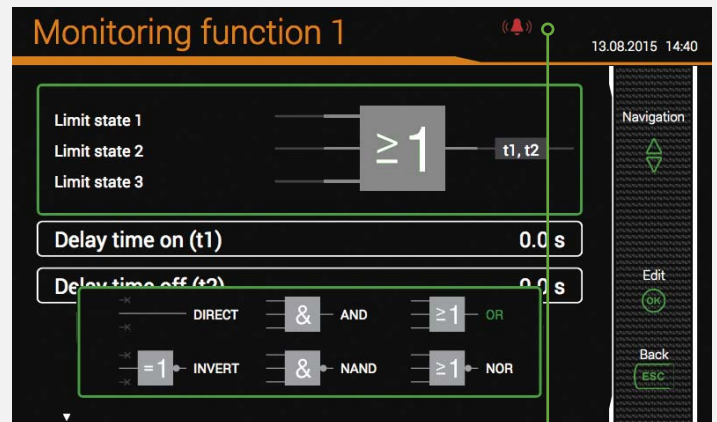

DATA RECORDING

The devices may be equipped with a high-performance data logger which has the following recording options in its comprehensive version:

• PERIODIC DATA

Selectable measured values are saved in regular intervals, e.g. to acquire load profiles (intervals of 10s to 1h) or periodic meters readings (e.g. daily, weekly, monthly).

• EVENTS

A type of logbook which records the occurrence of events together with time information: Triggering and declining of monitoring functions, changes in configuration, power cuts and much more.


• DISTURBANCE RECORDER

Recording of current and voltage progression in case of disturbances on basis of 1/2 cycle RMS values (AM1000/AM3000 only). In AM3000, the additional registration of the curve shape during the disturbance is also possible. This type of registration corresponds to the requirements of the EN 61000-4-30 power quality standard.

The event list and the recordings of the disturbance recorder may be visualised right on the device. More extensive analyses are available via the webpage of the device.

An SD card is used as a memory element by AM2000/AM3000.

AM1000 uses an internal memory element.

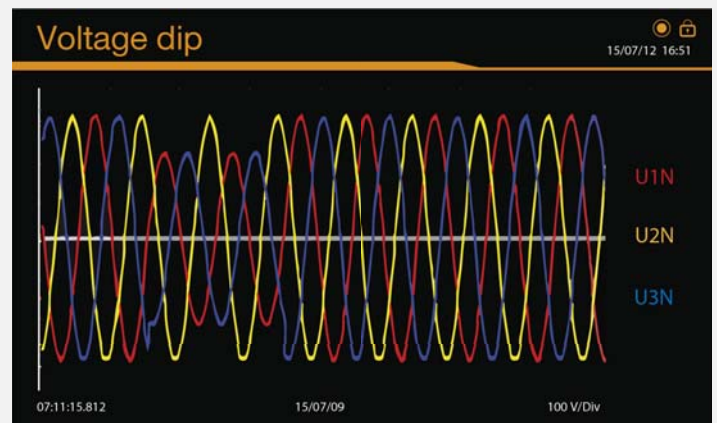




TECHNICAL DATA


INPUTS		BASIC UNCERTAINTY ACCORDING IEC/EN 60688		
NOMINAL CURRENT	1 ... 5 A (max. 7.5A)		AM1000/2000	AM3000
Maximum	7.5A	Voltage, current	±0.2 %	±0.1 %
Overload capacity	10A permanent 100A, 5x1 s, interval 300 s	Power	±0.5 %	±0.2 %
		Power factor	±0.2°	±0.1°
		Frequency		±0.01 Hz
NOMINAL VOLTAGE	57.7 ... 400V _{LN} , 100 ... 693V _{LL}	Imbalance U, I		±0.5 %
Maximum	480V _{LN} , 832V _{LL} (sinusoidal)	Harmonic		±0.5 %
Overload capacity	480V _{LN} , 832V _{LL} permanent 800V _{LN} , 1386V _{LL} , 10x1 s, interval 10 s	THD U, I		±0.5 %
Nominal frequency	42 ... 50 ... 58 Hz, 50.5 ... 60 ... 69.5 Hz	Active energy	Class 1	Class 0.5S (EN 62 053-22)
Measurement TRMS	Up to 60th harmonic	Reactive energy	Class 1	Class 0.5S (EN 62 053-24)
POWER SUPPLY VARIANTS		INTERFACES		
Nominal voltage	100 ... 230V AC/DC (AM1000) 110 ... 230V AC, 130 ... 230V DC (AM2000/3000) 110 ... 200V AC, 110 ... 200V DC (AM2000/3000) 24 ... 48V DC (AM1000/2000/3000)	ETHERNET	Standard (AM3000), optional (AM1000/AM2000)	
Consumption	≤ 20VA	Connection	RJ45 socket	
		Physics	Ethernet 100Base TX	
		Mode	10/100 MBit/s, full/half duplex, autonegotiation	
		Protocols	Modbus/TCP, http, NTP (time synchronisation)	
		MODBUS/RTU	Standard (AM2000), optional (AM1000/AM3000)	
		Physics	RS-485, max. 1200 m (4000 ft)	
		Baud rate	2.4 to 155.2 kBaud	
		Number of participants	≤ 32	
TYPES OF CONNECTION		TIME REFERENCE	Internal clock	
Single phase or split phase (2-phase system)		Clock accuracy	± 2 minutes/month (15 to 30°C)	
3 or 4-wire balanced load		Synchronisation	NTP server	
Only AM1000/AM3000: 3-wire balanced load [2U, 1I]		Power reserve	> 10 years	
3-wire unbalanced load, Aron connection				
3 or 4-wire unbalanced load				
4-wire unbalanced load, Open-Y				
I/O-INTERFACE		ENVIRONMENTAL CONDITIONS, GENERAL INFORMATION		
ANALOG OUTPUTS	(optional)	Operating temperature	-10 to 15 to 30 to +55 °C	
Linearization	Linear, kinked	Storage temperature	-25 to +70 °C	
Range	±20 mA (24 mA max.), bipolar	Temperature influence	0.5 x basic uncertainty per 10 K	
Accuracy	±0.2% of 20 mA	Long-term drift	0.5 x basic uncertainty per year	
Burden	≤ 500 Ω (max. 10 V/20 mA)	Others	Application group II (EN 60 688)	
Burden influence	≤ 0.2 %	Relative air humidity	<95 % without condensation	
Residual ripple	≤ 0.4 %	Operating altitude	≤2000 m above MSL	
		Only to be used in buildings!		
RELAYS	(optional)	MECHANICAL PROPERTIES		
Contacts	Changeover contact, bistable	Installation position	Control panel installation	
Load capacity	250V AC, 2A, 500VA 30V DC, 2A, 60W	Housing material	Polycarbonate (Makrolon)	
		Flammability class	V-0 according UL94, self-extinguishing, not dripping, free of halogen	
		Weight	800 g (AM2000/AM3000), 400 g (AM1000)	
DIGITAL INPUT		SAFETY	Current inputs are galvanically isolated from each other.	
Nominal voltage	12/24V DC (30V max.)	Protection class	II (protective insulation, voltage inputs via protective impedance)	
Logical ZERO	-3 to +5V	Pollution degree	2	
Logical ONE	11 to 30V	Protection	IP54 (front), IP30 (housing), IP20 (terminals)	
DIGITAL OUTPUTS		Measurement category	CATIII	
Nominal voltage	12/24V DC (30V max.)			
Nominal current	50 mA (60 mA max.)			
Load capacity	400 Ω ... 1 MΩ			



DIMENSIONAL DRAWINGS AM1000

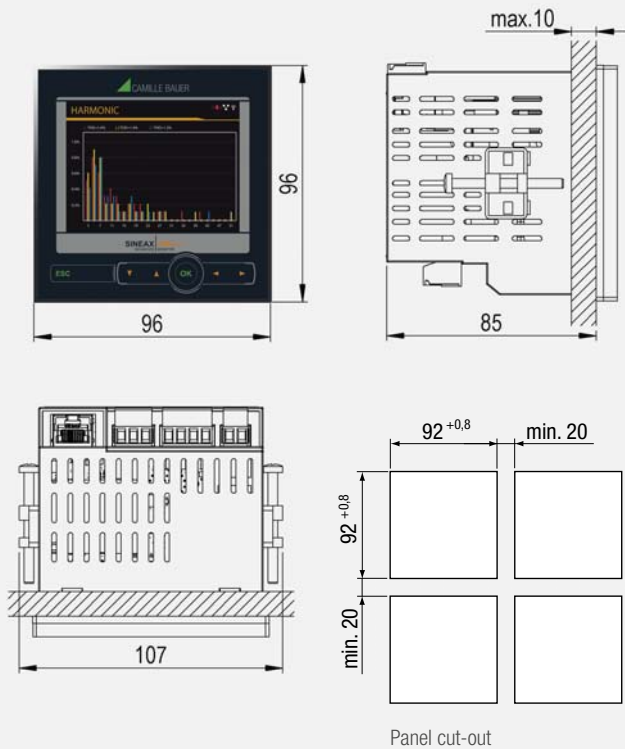

DIMENSIONAL DRAWINGS AM2000/AM3000

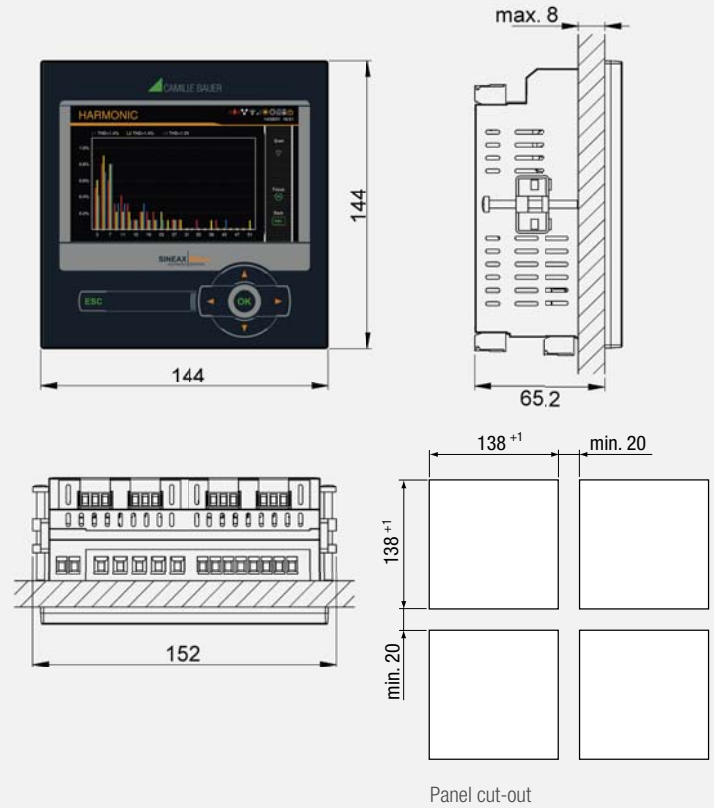

ORDER CODE

ORDER CODE AM1000-

1. BASIC DEVICE AM1000		6. I/O-EXTENSION	
With TFT display, for control panel installation	1	Without	0
2. INPUT FREQUENCY RANGE		2 relays	1
Current transformer inputs, 42 ... 50/60 ... 69.5 Hz	1	2 analog outputs, bipolar (± 20 mA)	2
3. POWER SUPPLY		4 analog outputs, bipolar (± 20 mA)	3
Nominal voltage 100 ... 230 V AC/DC	1	7. TEST PROTOCOL	
Nominal voltage 24 ... 48 V DC	2	Without	0
4. BUS CONNECTION		Test protocol in German	D
Without	0	Test protocol in English	E
Ethernet (Modbus/TCP + web server)	1		
RS485 (Modbus/RTU)	2		
Ethernet (Modbus/TCP + web server) + RS485 (Modbus/RTU)	3		
5. DATA LOGGER		ACCESSORIES	ARTICLE NO.
Without	0	Documentation CD	156 027
Periodic Data + events ¹⁾	1	Interface converter USB <> RS485	163 189
Disturbance recorder + events ¹⁾	2		
Periodic Data + events + disturbance recorder ¹⁾	3		


¹⁾ Datalogger only possible for device variants with Ethernet



ORDER CODE

ORDER CODE AM2000-		
1. BASIC DEVICE AM2000		
With TFT display, for control panel installation		1
2. INPUT FREQUENCY RANGE		
Current transformer inputs, 42 ... <u>50/60</u> ... 69.5 Hz		1
3. POWER SUPPLY		
Nominal voltage 110 ... 230 V AC, 130 ... 230 V DC		1
Nominal voltage 24 ... 48 V DC		2
Nominal voltage 110 ... 200 V AC, 110 ... 200 V DC		3
4. BUS CONNECTION		
Without		0
RS485 (Modbus/RTU slave)		1
RS485 (Modbus/RTU slave) + Ethernet (web server)		2
RS485 (Modbus/RTU slave) + Ethernet (Modbus/TCP protocol + web server)		3
RS485 (Modbus/RTU) + Ethernet (Modbus/TCP + web server) + data logger (periodic data + events)		4
5. I/O EXTENSION 1		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
6. I/O EXTENSION 2		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
7. I/O EXTENSION 3		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
8. I/O EXTENSION 4		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
9. TEST PROTOCOL		
Without		0
Test protocol in German		D
Test protocol in English		E

ORDER CODE AM3000-		
1. BASIC DEVICE AM3000		
With TFT display, for control panel installation		1
2. INPUT FREQUENCY RANGE		
Current transformer inputs, 42 ... <u>50/60</u> ... 69.5 Hz		1
3. POWER SUPPLY		
Nominal voltage 110 ... 230 V AC, 130 ... 230 V DC		1
Nominal voltage 24 ... 48 V DC		2
Nominal voltage 110 ... 200 V AC, 110 ... 200 V DC		3
4. BUS CONNECTION		
Ethernet (Modbus/TCP + web server)		1
Ethernet (Modbus/TCP + web server) + RS485 (Modbus/RTU)		2
5. DATA LOGGER		
Without		0
Periodic data + events		1
Disturbance recorder + events		2
Periodic data + events + disturbance recorder		3
6. I/O EXTENSION 1		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
7. I/O EXTENSION 2		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
8. I/O EXTENSION 3		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
9. I/O EXTENSION 4		
Without		0
2 relays		1
2 analog outputs, bipolar (± 20 mA)		2
4 analog outputs, bipolar (± 20 mA)		3
10. TEST PROTOCOL		
Without		0
Test protocol in German		D
Test protocol in English		E



I/O EXTENSIONS AM2000/AM3000

Maximum one I/O extension with analog outputs may be provided per device.

I/O extension 4 only possible for a variant without data logger.

ACCESSORIES

ARTICLE NO

Documentation CD	156 027
Interface converter USB <> RS485	163 189



SMARTCOLLECT



SMARTCOLLECT is a data management software which can acquire measured data in an easy manner and store the same in an open SQL database. This software offers basic functionalities for data analysis and for easy energy monitoring as well as the easy preparation and disposal of reports.

Providing a mature graphic user interface, the SMARTCOLLECT software is clearly structured and easily operated.

SMARTCOLLECT is modularly designed and permits supplementing modules or functions at any time.


CUSTOMER BENEFITS

- Easy data communication via Modbus RTU / TCP, ECL and SmartControl-Direct
- Connection also via OPC
- Devices of Camille Bauer and Gossen Metrawatt are already predefined and selectable in the software
- Open for the devices of all manufacturers
- Data is stored in an open SQL database
- Modular cost / performance model – basic version may be extended at any time



MODULAR DESIGN

COMPONENTS

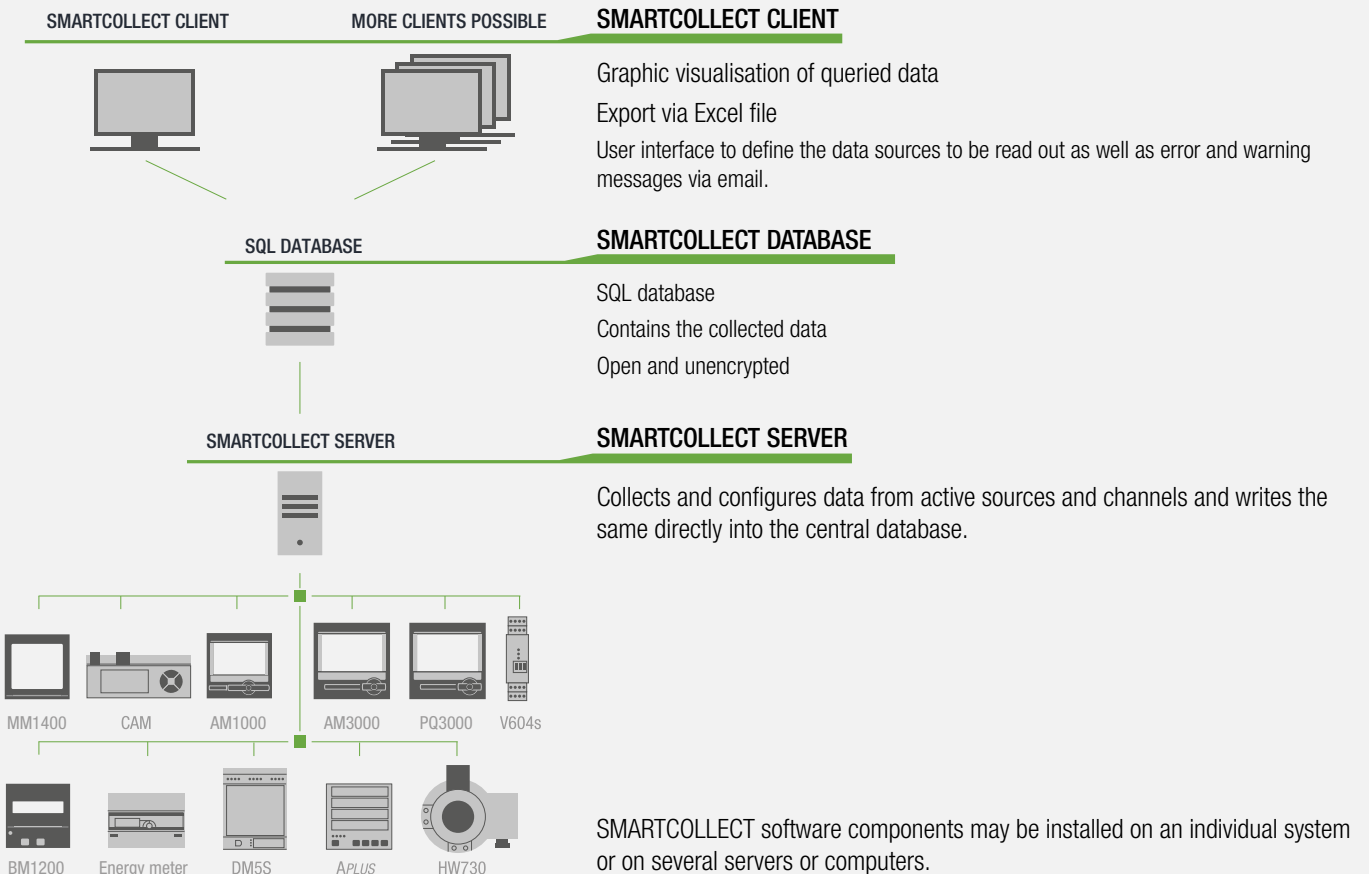The SMARTCOLLECT data management software consists of the following components:



GMC INSTRUMENTS

 **GOSSEN METRAWATT**
 **CAMILLE BAUER**

Camille Bauer Metrawatt AG
Aargauerstrasse 7 ■ 5610 Wohlen ■ Switzerland
TEL +41 56 618 21 11 ■ FAX +41 56 618 21 21

www.camillebauer.com ■ info@cbmag.com

