


OFFICE CONTAINER


- **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- **Wall:** polyurethane or rockwool insulated sandwich panels exterior and interior walls.
- **Insulation thickness:** 50mm,60mm,80mm or 100mm.
- **Ceiling :** 80mm polyurethane insulated ceiling.
- **Flooring:** 03mm PVC flooring (optional: parquet or ceramic tile).
- **Door and Window Joinery:** Aluminum or PVC windows (optional: large window, bay window, aluminum or PVC shutters, blinds, steel railings for windows and doors). Lighting and Electrical Equipment are ncluded.
- **Internal Arrangement (optional):** air conditioning, furniture, data sockets.
- **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.

www.module-t.com

20 FEET

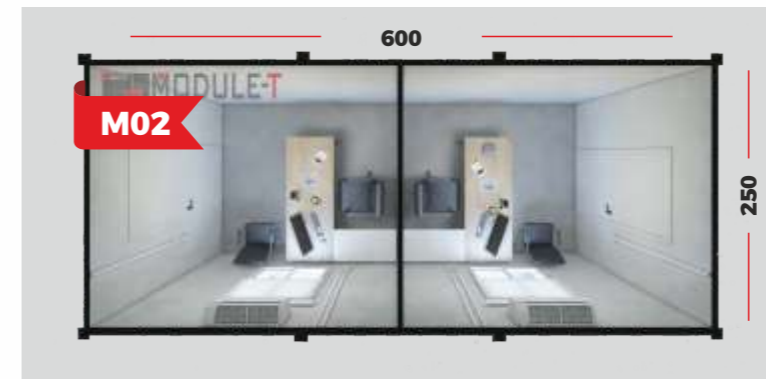

10 FEET

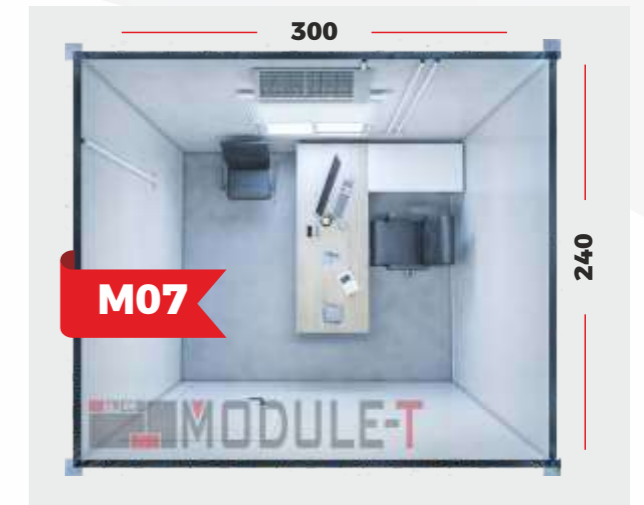


Delivery in a Special Package:


up to 10 pcs of M01/M02 are delivered in a special package with a 40 High Cube shipping container.

Fully Equipped

Modular Office Solutions

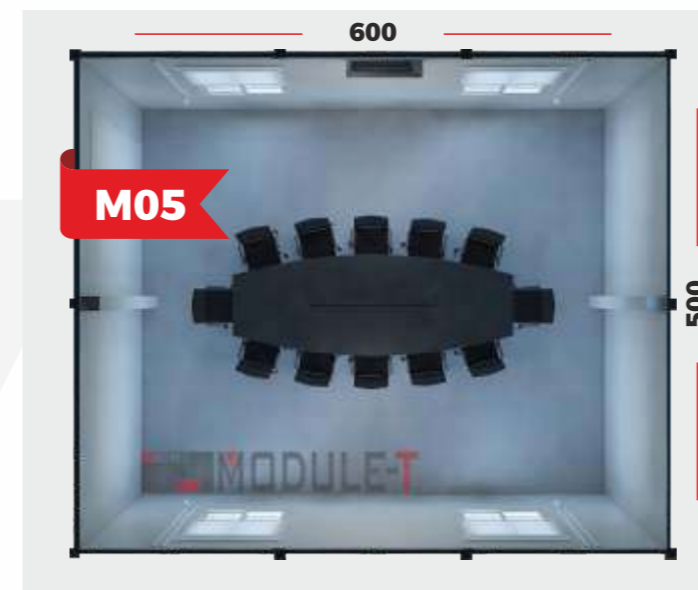

40 FEET

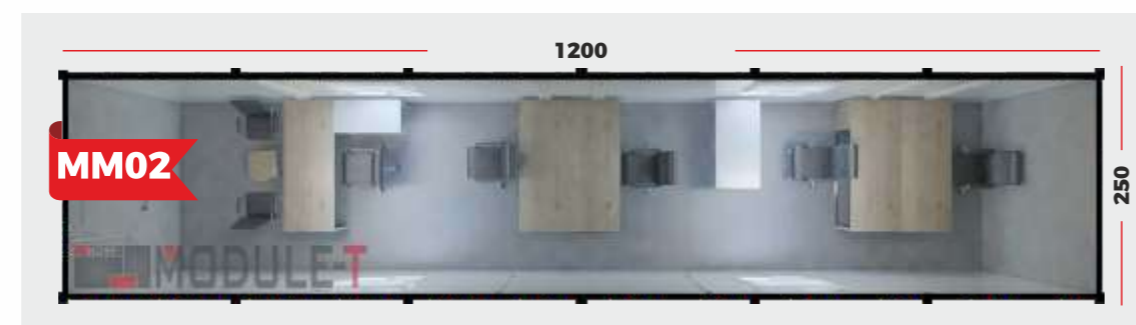

LOCKER CONTAINER

Technical Specifications





- ▣ **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- ▣ **Wall:** polyurethane or rockwool insulated sandwich panels exterior and interior walls. Insulation thickness: **40mm,50mm,60mm,80mm or 100mm.**
- ▣ **Ceiling:** 40mm or 80mm polyurethane insulated ceiling.
- ▣ **Flooring:** 18mm fibercement panel surface + 03mm PVC flooring. Optional: ceramic tile or steel sheet floor covering.
- ▣ **Door and Window Joinery:** Aluminum or PVC windows and doors, window and door protection steel bar (optional).
- ▣ **Lighting and Electrical Equipment are included.**
- ▣ **Sanitary equipment:** Ceramic hand wash 37x45cm, Acrylic shower tray 102x92cm, ceramic wc. Option: stainless wc and hand wash, **cubicle compact laminate wc and shower cabins.**
- ▣ **Furnitures(Optional) :** Steel Lockers and bench.
- ▣ **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- ▣ **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.



Fully Equipped

Locker Prefabricated Containers

20 FEET

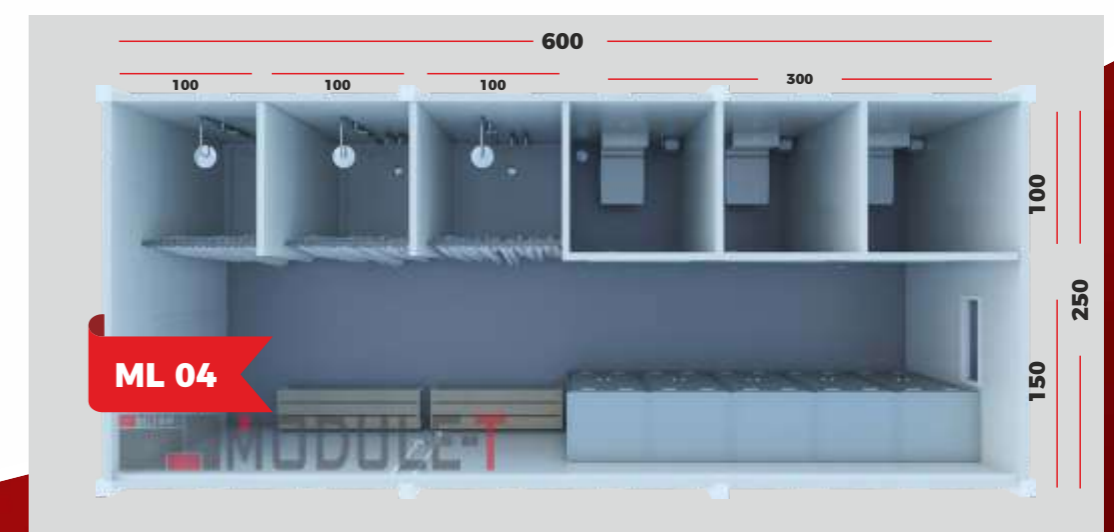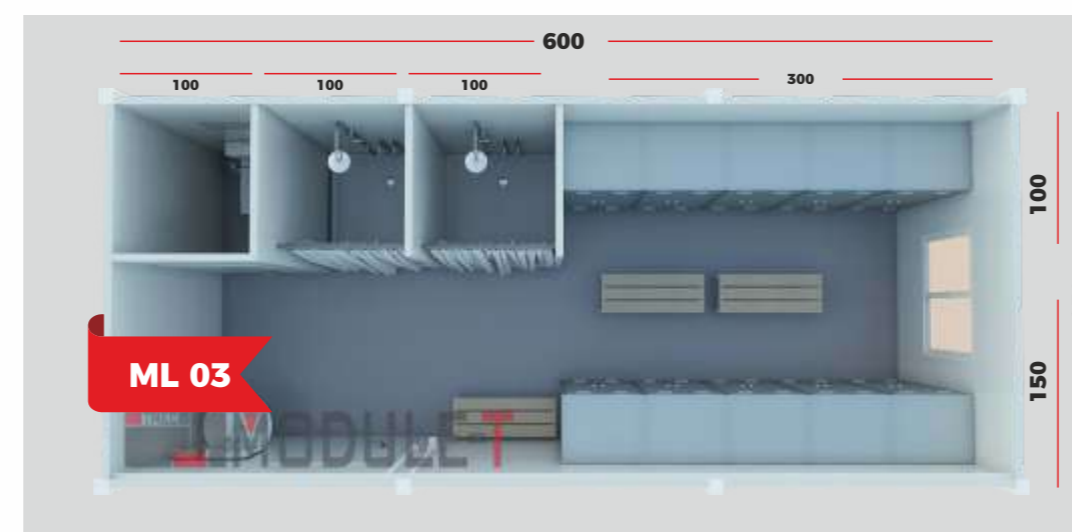
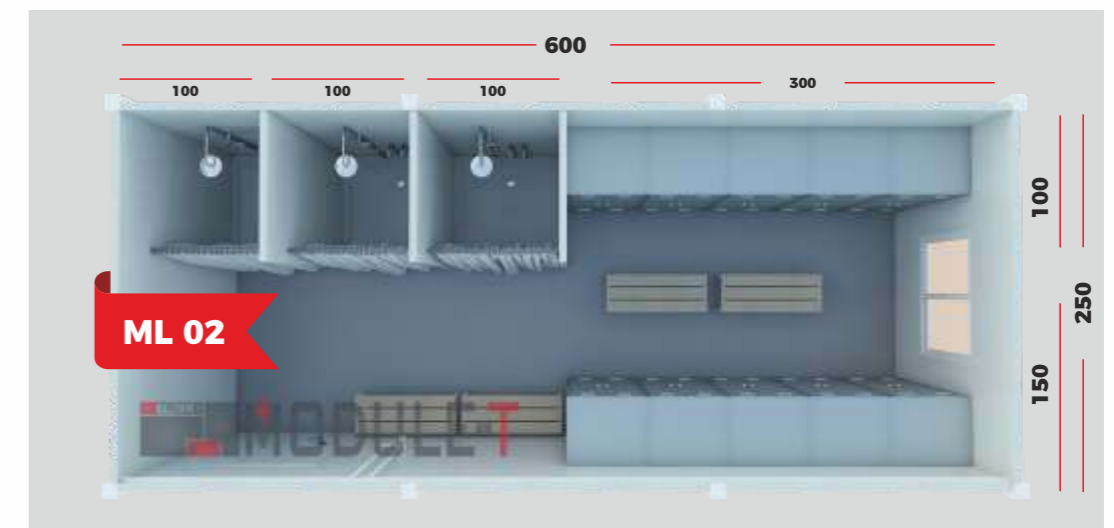
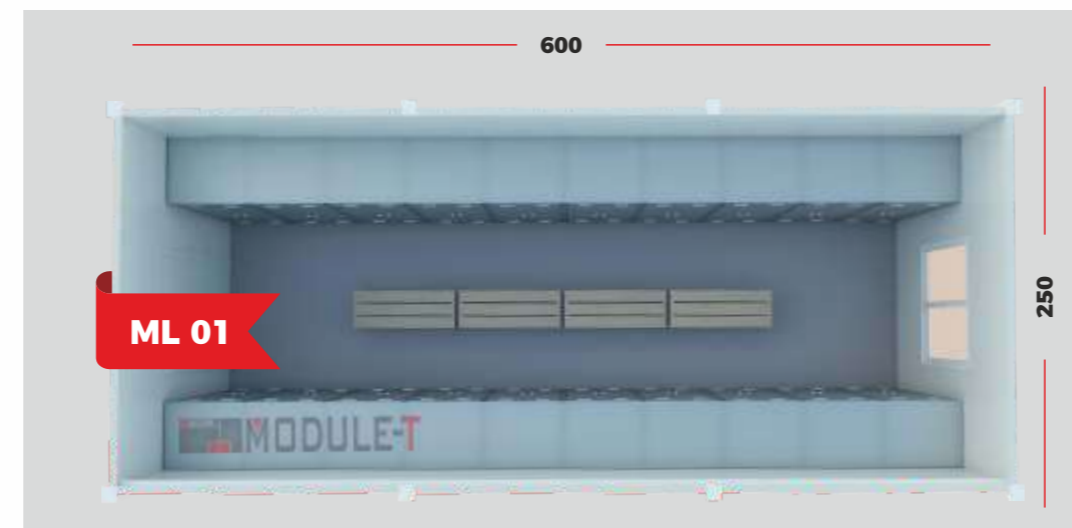


SANITARY CONTAINER




WC & SHOWER CABINS

Technical Specifications

- ▣ **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- ▣ **Wall:** polyurethane or rockwool insulated sandwich panels exterior and interior walls. Insulation thickness: **40mm, 50mm, 60mm, 80mm or 100mm.**
- ▣ **Ceiling:** 40mm or 80mm polyurethane insulated ceiling.
- ▣ **Flooring:** 18mm fibercement panel surface + 03mm PVC flooring. Optional: ceramic tile or steel sheet floor covering.
- ▣ **Door and Window Joinery:** Aluminum or PVC windows and doors, window and door protection steel bar (optional).
- ▣ **Lighting and Electrical Equipment are included.**
- ▣ **Sanitary equipment:** Ceramic hand wash 37x45cm, Acrylic shower tray 102x92cm, ceramic wc. Option: stainless wc and hand wash, cubicle compact laminate wc and shower cabins.
- ▣ **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- ▣ **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.

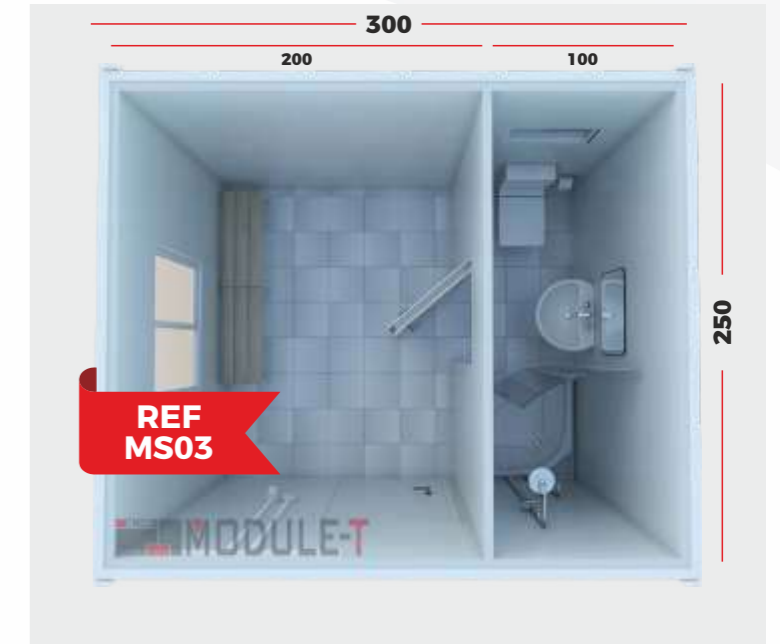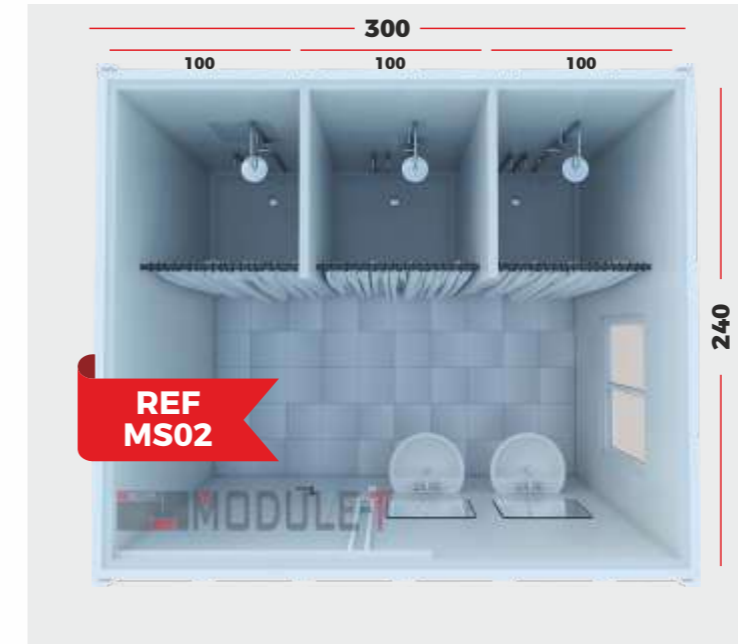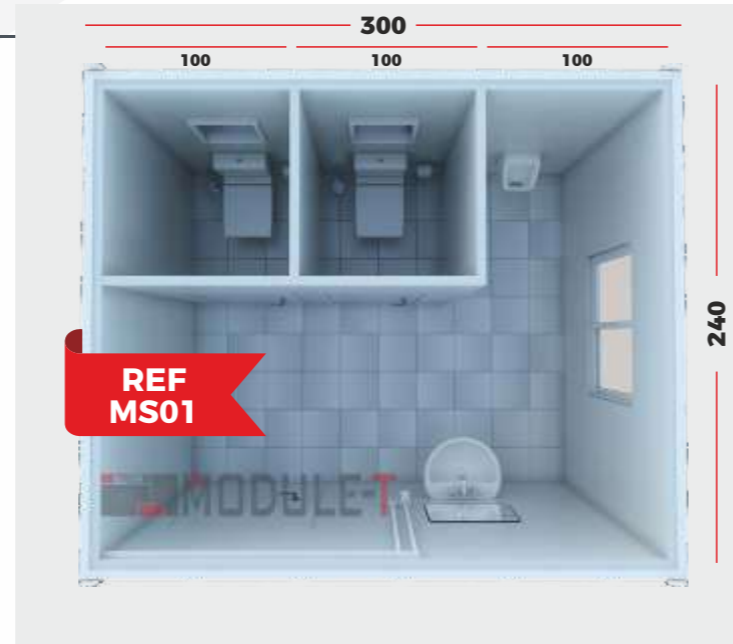

20 FEET

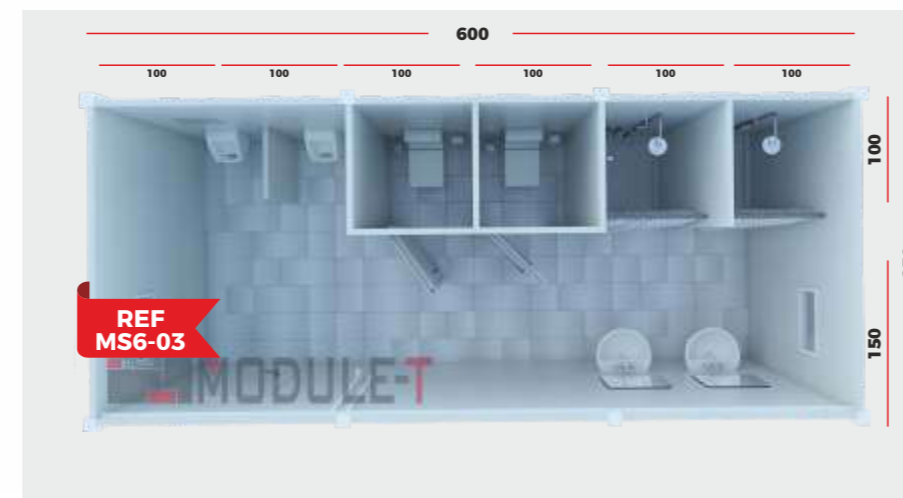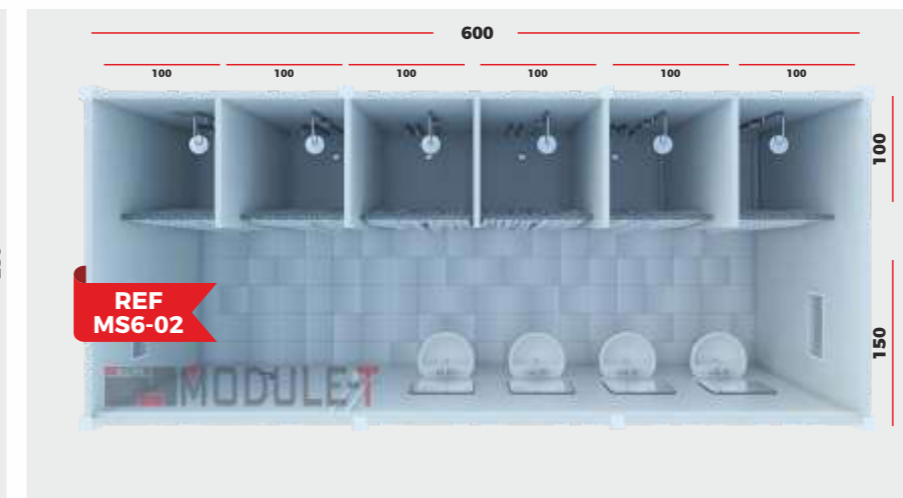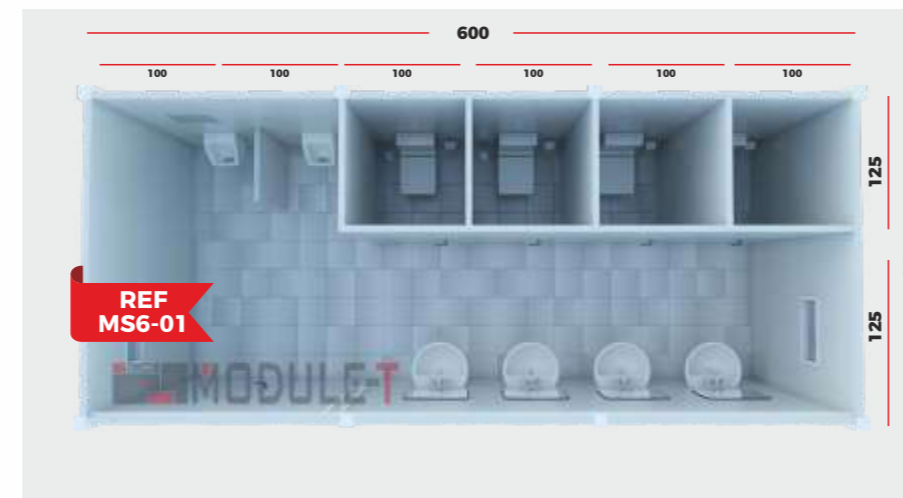

Delivery in a Special Package:


up to 08 pcs of fully equipped sanitary container are delivered in a special package with a 40 High Cube shipping container.



ACCOMMODATION CONTAINER

Technical Specifications

- ▣ **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- ▣ **Wall: polyurethane, rockwool or expanded polystyrene foam** insulated sandwich panels exterior and interior walls. Wall thickness: **50mm,60mm,80mm or 100mm.**
- ▣ **Ceiling:** 40mm or 80mm polyurethane insulated ceiling.
- ▣ **Flooring:** 18mm fibercement panel surface + 03mm PVC flooring. Optional: parquet or ceramic tile. Optional: 50mm or 100mm rockwool floor chassis insulation.
- ▣ **Door and Window Joinery:** Aluminum or PVC windows and doors, window and door protection steel bar (optional).
- ▣ **Lighting (IP65) and Electrical Equipment are included**
- ▣ **Sanitary equipment:** Ceramic hand wash 37x45cm, Acrylic shower tray 102x92cm, ceramic wc. Option: **stainless wc and hand wash, cubicle compact laminate wc and shower cabins**
- ▣ **Internal Arrangement (optional):** air conditioning, furniture (steel locker and bench).
- ▣ **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- ▣ **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.

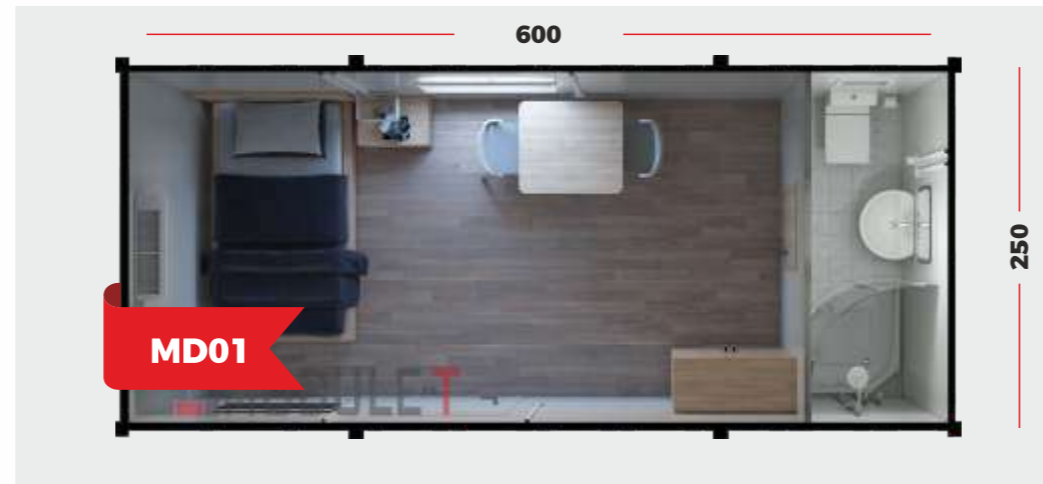

20 FEET

Fully Equipped
Modular Accommodation Container



40 FEET

