

## TECHNICAL INFORMATION


# Hydraulic Rod Seals | Turcon® Glyd Ring®



### Turcon® Glyd Ring®

Turcon® Glyd Ring® is a double-acting O-Ring energized rod seal for dynamic applications. It provides low friction with no stick-slip, minimal break out force and high wear resistance. Installed in grooves to ISO 7425.

Ø Range	Pressure Range	Temperature Range	Velocity
3 - 2,600 mm	60 MPa	-45 °C +200 °C	15 m/s
0.118 in - 102 in	8,700 psi	-50 °F +390 °F	50 ft/s

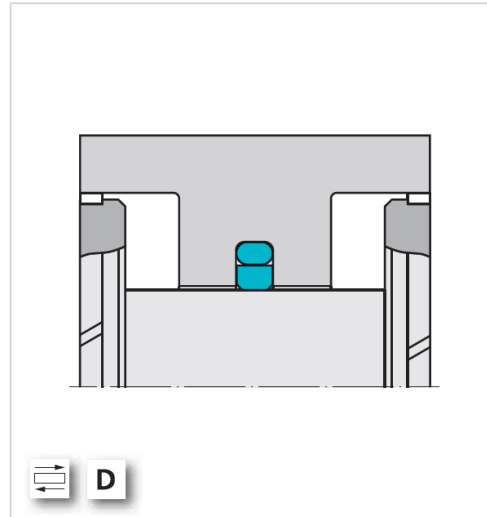

**KEY TO APPLICATIONS:** Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = S Double-acting = D

### Important Note

Installation suggestions, material recommendations, parameters and further data provided are always subject to the particular field of use and the application in which the seal is intended to be used, in particular the interaction of the seal with other components of the application. Therefore they neither constitute an agreement on the legal and factual nature nor a guarantee of quality. Technical changes and errors remain reserved.