



P.C.B LAYOUT

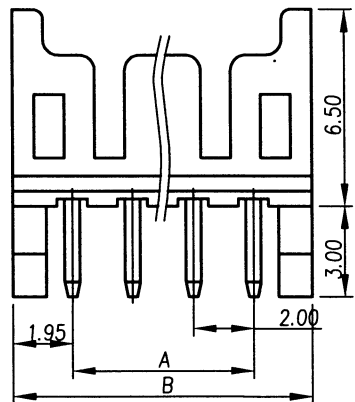

REV	MODIFICATION	DATE	DRAW

NOTES:

SPECIFICATION:

- 1.Current Rating: 1A AC,DC
- 2.Voltage Rating: 100V AC,DC
- 2.Withstanding Voltage: 800 V AC/Minute.
- 3.Insulation Resistance: 1000 Megohms Min.
- 4.Contact Resistance: 20 Milliohms Max.
- 5.Operation Temperature: -25°C to +85°C

MATERIAL:

- 1.Contact: BRASS 0.50mm Square Pin
- 2.Housing: Nylon 66,UL 94V-0
- 3.Plated: Tin Plated

ORDERING INFORMATION:

FPHRI-2 XX T1 X 020

NO. OF CONTACT      COLOR  
M:MILK WHITE  
W:WHITE

POLES	DIMENSIONS		POLES	DIMENSIONS	
	A	B		A	B
6	4.00	8.00	26	24.00	28.10
8	6.00	10.00	28	26.00	30.10
10	8.00	12.00	30	28.00	32.10
12	10.00	14.00	32	30.00	34.10
14	12.00	16.00			
16	14.00	18.00			
18	16.00	20.00			
20	18.00	22.00			
22	20.00	24.00			
24	22.00	26.00			

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE 2.00mm FEMALE PIN HEADER DIP 180° CUSTOMER DRAWING	
.X±	.X"±	APPROVE <i>[Signature]</i> 13/03	FILE NO.	DWG NO. FPHRI-2XXT1X020
.XX±	.X"±	CHECK <i>[Signature]</i> 13/03	SIZE A4	PROJ.  SHEET 1 / 1
.XXX±	.XX"±	DRAW <i>[Signature]</i>	SCALE 4:1	REV A