




LUMIMAX[®] mounting system MS4 for LSB-series

Standardized verification
 (ISO/IEC 15415 TR 29158)
DataMatrix - Code

position 1 (P1) - incident angle 45°
 position 2 (P2) - incident angle 30°



+

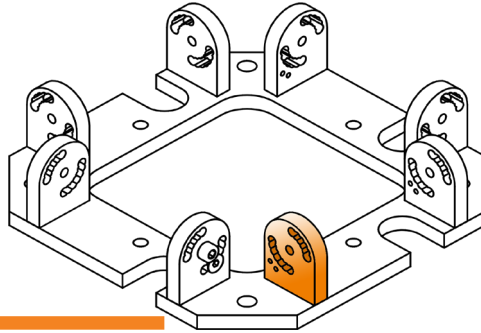

LSB - series consists of
 LSB50 / LSB50FL
 LSB100 / LSB100FL
 LSB150 / LSB150FL
 LSB200 / LSB200FL

LSB - mounting system for 1-4 bar lights of the LSB-series
 MS4-LSB50 für LSB50 / 50FL
 MS4-LSB100 für LSB100 / 100FL
 MS4-LSB150 für LSB150 / 150FL
 MS4-LSB200 für LSB200 / 200FL



Installation of 2 LSB-Bar-Lights




Installation of 3 LSB-Bar-Lights



Installation of 4 LSB-Bar-Lights



+

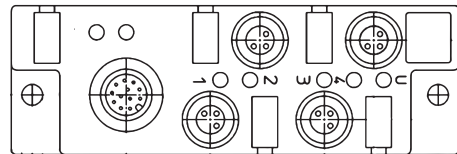


Electrical connection via connecting cable M8

VS- 4x M8/3pol - 1x M12/12pol
 Four-way distributor to connect
 max. 4 LSB-Bar-Lights



LUMIMAX[®] mounting system for LSB-series - Technical drawing

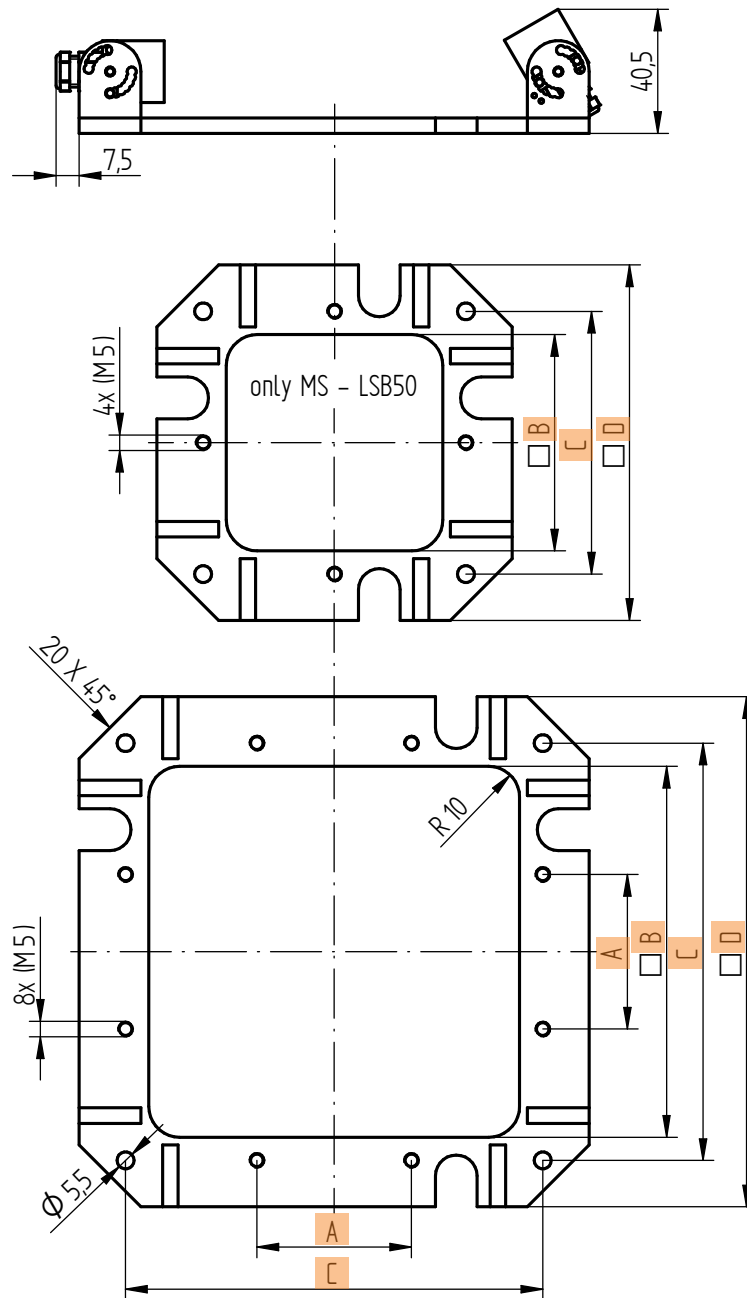

Size information for the respective lighting:

Lighting	A (mm)	B (mm)	C (mm)	D (mm)
LSB50	-	70	85	115
LSB100	50	120	135	165
LSB150	100	170	185	215
LSB200	150	220	235	265