

Kabelverschraubungen / Cable Glands



wege® M Classic ZE / Strain relief


Material	Messing vernickelt	material	brass nickel-plated
Schrauben	Edelstahl	screws	stainless steel
Dichtring	① NR/NBR ② CR/EPDM	sealing ring	① NR/NBR ② CR/EPDM
Schutzklasse	IP54	protection class	IP54
Temperaturbereich	① -40 °C bis +90 °C ② -30 °C bis +120 °C	range of temperature	① -40 °C to +90 °C ② -30 °C to +120 °C


Gewinde thread		Dichtring sealing ring	SW1	SW2	H	L		Bestell-Nr. ref.-number
-------------------	---	---------------------------	-----	-----	---	---	---	----------------------------

kurzes Anschlussgewinde / short connection thread									
M 12 x 1,5	5 – 6	S	②	17	14	25	5	50	172.1200.0
M 16 x 1,5	6 – 10	UNI	②	17	18	25	5	50	172.1600.7
M 20 x 1,5	7,5 – 11,5	UNI	①	20	22	26	6	50	170.2011.6
M 20 x 1,5	8,5 – 13,5	UNI	②	22	22	28	6	50	172.2000.7
M 20 x 1,5	11 – 15	UNI	①	22	24	27	6	50	170.2016.6
M 25 x 1,5	13 – 18	UNI	②	30	27	31	7	50	172.2500.7
M 32 x 1,5	18 – 25	UNI	②	36	34	35	8	20	172.3200.7
M 40 x 1,5	29 – 34	UNI	①	50	50	42	8	10	170.4036.6
M 50 x 1,5	34 – 40	UNI	①	57	57	56	9	5	170.5042.6
M 63 x 1,5	39 – 46	UNI	①	64	66	58	10	5	170.6348.6

Pg 9	6 – 10	UNI	①	17	17	25	6	50	170.0900.6
Pg 11	7,5 – 11,5	UNI	①	20	20	26	6	50	170.1100.6
Pg 13,5	8,5 – 13,5	UNI	①	22	22	27	6,5	50	170.1300.6
Pg 16	10 – 15	UNI	①	24	24	29	6,5	50	170.1600.6
Pg 21	13 – 20	UNI	①	30	30	30	7	25	170.2100.6
Pg 29	20 – 27	UNI	①	40	40	36	8	20	170.2900.6
Pg 36	29 – 34	UNI	①	50	50	42	9	10	170.3600.6
Pg 42	34 – 40	UNI	①	57	57	56	10	5	170.4200.6
Pg 48	39 – 46	UNI	①	64	64	58	10	5	170.4800.6

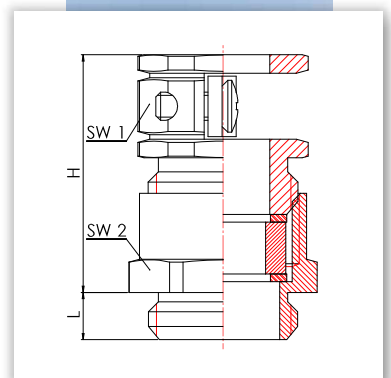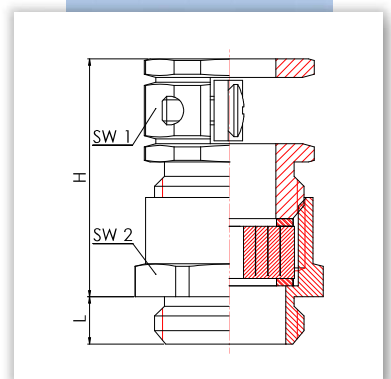

 Einseitige Zugentlastung

 One-sided strain relief