



Valve Seat Refacing Machine for Valve Seat Diameter Range 35 - 90mm



- Compact and handy design.
- Powered by safety extra low voltage to avoid risk of electrical shock.
- Easy to use
- Fast set-up time.
- No abrasive dust.
- A fast clean cut.
- A precise seat angle time and again.
- Tested and specified by leading engine manufacturers.



Refacing Head Type D2/xx°

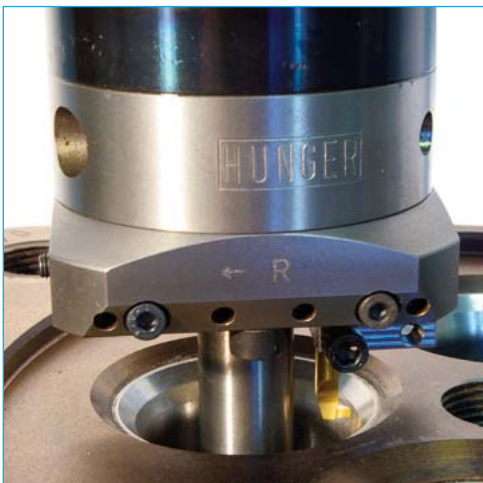

Groove Cutting Head Type D2/S0

WORKING PRINCIPLE

The valve seat is refaced to the preset depth by the simultaneous application of both a rotary and a transverse feed motion to the cutting tool fitted with an indexable cutting insert.

While the cutting insert rotates in a circle around the valve seat, a feed gear mechanism ensures a continuous outward transverse feed motion under the proper seat angle.

This angle is defined by an inclined slideway provided for the tool slide in the seat refacing head.

The seat refacing head with the built-in slideway for cutting tool travel is exchangeably mounted to the feed gear unit to ensure a precise seat angle eliminating faulty setting operations.

The VDS2E is aligned and guided by a pilot which is locked in the valve guide bore and stabilized by a supporting spider just below the valve seat.

The lathe-type refacing action provides a flawless concentric seating surface texture for a perfect valve seal.

Roundness, concentricity and surface finish of the refaced valve seat are within manufacturers' specifications or even better.

FEATURES

The machine is fitted with two motors providing a smooth cutting action.

A refacing head for face turning is available in addition to the valve reseating heads for the popular seat angles.

A special groove cutting head is available for cutting a groove into the valve seat ring so that the hook elements of a puller can grip the valve seat ring for removing the valve seat ring from the cylinder head.

SPECIFICATIONS

Capacity

Seat diameter range	35 - 90 mm
Seat angle range	0° - 45°

Cutting Motions

Cutting Speed	280 and 380 rpm
Cross Feed per Revolution	0,05 mm

Electrics

Operating voltage	max. 42 VDC
Power Supply	
Input voltage:	230±10% VAC
(1ph.50/60Hz)	or 120±10% VAC
	or 277±10% VAC
Power input	0,3 kW

Dimensions

Length	410 mm
Width	125 mm
Height	340 mm

Weight

Net weight	approx. 7,5 kg
------------	----------------

HANDLING

Setup is fast and easy.

First, lock the pilot with mounted supporting spider in the valve guide.

Then, lower the machine over the pilot and position the cutting tool in front of the inner edge of the valve seat.

Connect the machine to the separate power supply unit

Turn micrometer downfeed to set the desired depth of cut.


One

Refacing is automatic.

Pressing one button is enough to start the refacing pass.

Two to three passes will restore the valve seat to the original condition.

Modular Components

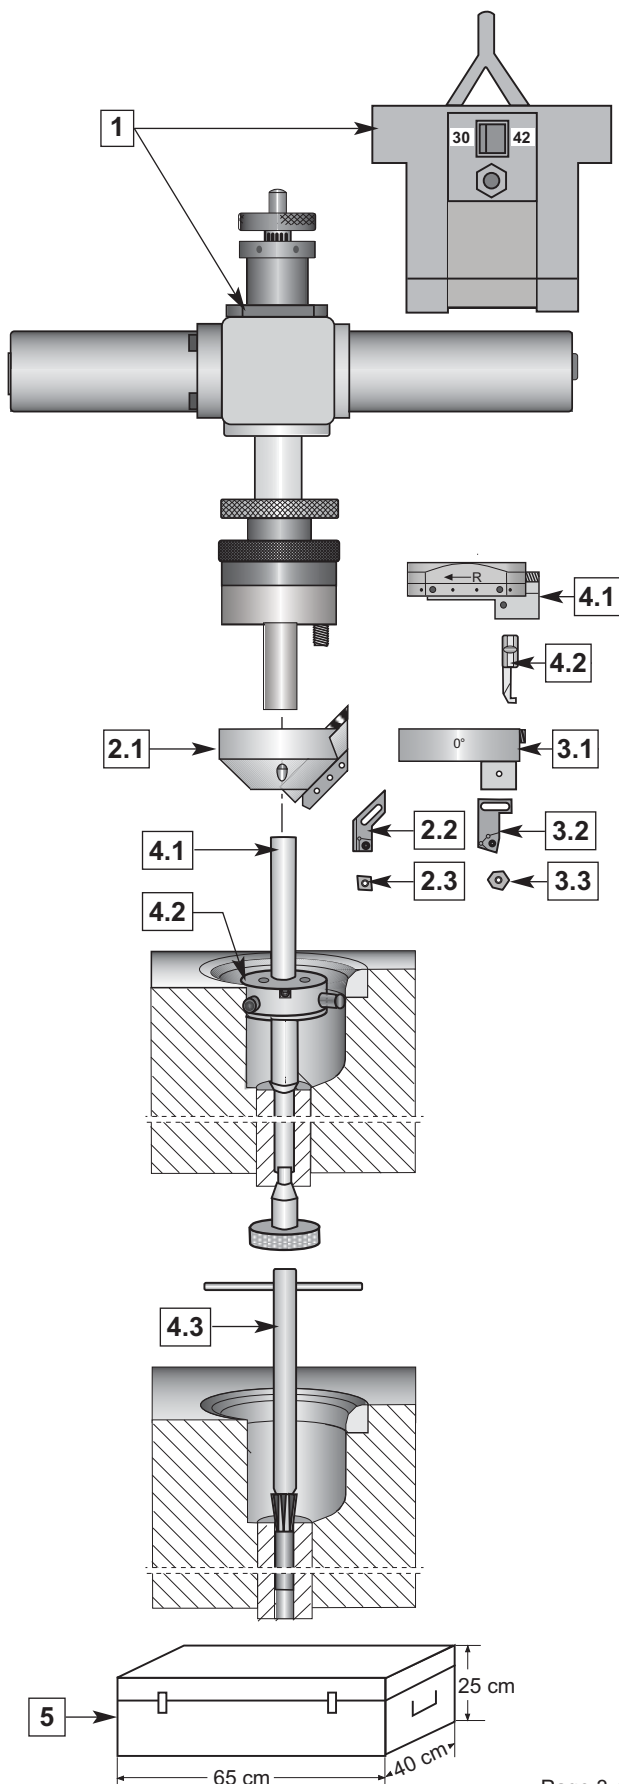

Item	Description	P/N
1.	VDS2E Basic Machine including Power Supply Unit wired for single-phase input voltage 230V, optional also 120V & 277V	247 05 200
2.	<u>Accessories for refacing valve seats</u>	
2.1	Valve Seat Refacing Heads	
2.1.1	D2/45° Seat Refacing Head for 45° seats	247 11 245
2.1.2	D3/35° Seat Refacing Head for 35° seats	247 14 235
2.1.3	D3/30° Seat Refacing Head for 30° seats	247 12 230
2.1.4	D3/25° Seat Refacing Head for 25° seats	247 15 225
2.1.5	D3/20° Seat Refacing Head for 20° seats	247 17 220
2.1.6	D3/15° Seat Refacing Head for 15° seats	247 13 215
2.2	Insert Holders for Refacing Valve Seats	
2.2.1	SD00 Insert Holder for seat diam. 35-60 mm	247 65 108
2.2.2	SC01 Insert Holder for seat diam. 40-75 mm	247 65 103
2.2.3	SC02 Insert Holder for seat diam. 70-90 mm	247 65 104
2.3	Cutting Inserts for Refacing Valve Seats	
2.3.1	Insert Type C0604CB for SD00 Holder Application: General purpose	862 20 021
2.3.2	Insert Type C0602HB for SD00 Holder Application: Very hard seats	862 20 016
2.3.3	Insert Type C0908CU for SC01/02 Holder Application: General purpose	862 20 007
2.3.4	Insert Type C0908HU for SC01/02 Holder Application: Super alloys	862 20 009
2.3.5	Insert Type C0904CB for SC01/02 Holder Application: Hard seats	862 20 010
2.3.6	Insert Type C0904HB for SC01/02 Holder Application: Cr & Ni alloys	862 20 013
2.3.7	Insert Type C0904HU for SC01/02 Holder Application: Very hard seats	862 20 015
2.3.8	Insert Type C0904CBN for SC01/02 Holder Application: Extremely hard seats	862 20 022
3.	<u>Accessories for face turning</u>	
3.1	D2/0° Face Turning Head for diam. 48-90 mm	247 19 200
3.2	Insert Holders for face turning	
3.1.1	SW1-0° Insert Holder for diam. range 48-65 mm	247 65 061
3.1.2	SW2-0° Insert Holder for diam. range 65-90 mm	247 65 112
3.3	Cutting Inserts for Face Turning	
3.3.1	Insert W0602HB for cast iron	862 20 005
3.3.2	Insert W0608HL for tough and hard material	247 20 005
4.	<u>Accessories for cutting grooves</u>	
4.1	D2/S0 Groove Cutting Head	247 19 200
4.2	Gooving tools	
4.2.1	Grooving tool type 6/2 for diam. range 48-75 mm	862 25 154
4.2.2	Grooving tool type 8/2 for diam. range 75-90 mm	862 25 156
4.	<u>Accessories for alignment</u>	
4.1	Pilots tailored to the respective engine model	on request
4.1.1	UP2 Universal Pilot Kit for valve guide diameter range 16-27 mm	247 70 100
4.2	Supporting Spiders for supporting pilot shaft just below the valve seat	on request
4.3	Chamfering Tools for cleaning the valve guide bore	on request
5.	Storage Case	247 90 038