



Fluke Process Instruments

Oven Tracker® XL2 Thermocouple Range 2

A comprehensive range to suit your exact application needs

- Designed to be accurate, repeatable and easy to operate
- Exceptionally durable, quad wrapped, 10 strand 36 AWG (0.125 mm/0.005 in), metal braid and PTFE sheathed* Type K thermocouple
- Specified to ANSI MC96.1 Special Limits of Error ($\pm 0.4\%$ or $\pm 1.1^\circ\text{C}/\pm 2.0^\circ\text{F}$, whichever is greater)
- IEC584 color standard (green) for Type K thermocouples
- Strong 'crimped' plug/cable attachment
- Circular cable cross section to reduce kinking and twisting
- Various cable lengths available

(*does not apply to PA0060/61/62, PA0215 and PA0180/82)

CLAMP THERMOCOUPLES

Clamp Surface

Clips to non-ferrous components for measuring substrate temperature.

PA0011	1.5 m (5 ft)	Maximum temperature 265°C (509°F)
PA0012	3.0 m (10 ft)	Maximum temperature 265°C (509°F)

Clamp Air


Clips to non-ferrous components for measuring the surrounding ambient air temperature.

PA0021	1.5 m (5 ft)	Maximum temperature 265°C (509°F)
PA0022	3.0 m (10 ft)	Maximum temperature 265°C (509°F)

EXPOSED JUNCTION THERMOCOUPLES

Exposed junction designed for use on test pieces that are left permanently rigged. Attached to the substrate by spot welding, soldering, use of high temperature tape or screw (washer). Used in applications, where conventional magnetic and clip attachment methods are not appropriate.

PA0063	1.5 m (5 ft)	Exposed Junction Maximum temperature 265°C (509°F)
PA0064	3.0 m (10 ft)	Exposed Junction Maximum temperature 265°C (509°F)
PA0081	1.5 m (5 ft)	Washer Maximum temperature 265°C (509°F)
PA0082	3.0 m (10 ft)	Washer Maximum temperature 265°C (509°F)

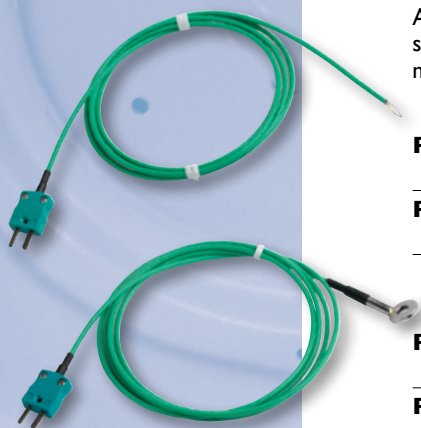

ADHESIVE PATCH THERMOCOUPLE

Ultra fast response, single strand and PTFE coated. Employs self-adhesive patch for attachment. Its minimal thermal mass makes it ideal for small items or plastics. Recommended for use in IR ovens, if the thermocouple requires over coating prior to the test.

PA0061	1.0 m (3 ft)	Maximum temperature 265°C (509°F)
PA0060	1.5 m (5 ft)	Maximum temperature 265°C (509°F)
PA0062	3.0 m (10 ft)	Maximum temperature 265°C (509°F)

EXPOSED JUNCTION THERMOCOUPLE – HIGH TEMPERATURE

Exposed junction thermocouple constructed of glass fiber cable and designed for high temperature coating applications, such as PTFE or Dacromet cure. Attached to the substrate by either high temperature tape or screw, or spot welded into position.

PA0215	0.8 m (2.6 ft)	Fast response, glass fiber Maximum temperature 500°C (932°F)
PA0182	1.5 m (5 ft)	Glass fiber Maximum temperature 500°C (932°F)
PA0180	3.0 m (10 ft)	Glass fiber Maximum temperature 500°C (932°F)

Fluke Process Instruments

EMEA

Cambridge, UK
Tel: +44 1223 652 400
sales@flukeprocessinstruments.co.uk

Americas

Derry, NH USA
Tel: +1 603 537 2680
sales@flukeprocessinstruments.com

China

Beijing, China
Tel: +86 10 6438 4691
sales@flukeprocessinstruments.com.cn

Asia East and South

India Tel: +91 22 2920 7691
Singapore Tel: +65 6799 5596
sales.asia@flukeprocessinstruments.com

Worldwide Service

Fluke Process Instruments offers services, including repair and calibration. For more information, contact your local office.

www.flukeprocessinstruments.com

© 2016 Fluke Process Instruments
Specifications subject to change without notice.
11/2016 OTXL2 Thermocouple Range2 RevB

