

TECHNISCHE DATEN:

Aufbau

Leisten Polyamid PA66 GF25 V-0
Dichtung TPE TPS

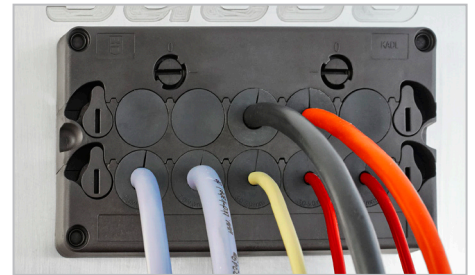
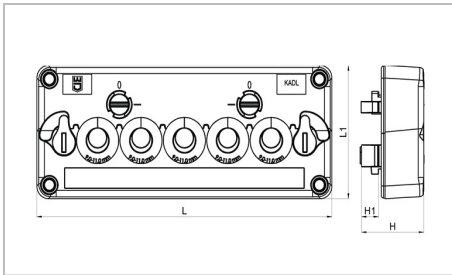
Eigenschaften

Technik werkzeuggesteigere Durchführungs- und An-
schlusstechnik für Maschinen und Anlagen
Anwendung mit der KADL können konfektionierte Leitungen
mit Stecker in Gehäuse eingeführt und
abgedichtet werden
Tüllen Varianten als Zubehör auszuwählen und separat zu bestel-
len aus Serie F311-9xxx-zz,
7 kleine Tüllen für Leitungen ØC = 3,0 - 16,0 mm,
9 große Tüllen für Leitungen ØC = 15,0 - 32,5 mm,
1 kleine Tülle und 1 große Tülle geschlossen
Befestigung einfache Montage bei Wandstärken von 1,5 bis
2,0 mm durch Einrasten, bei Wandstärken über
2,0 mm kann die KADL angeschraubt werden
Temperaturbereich -30 °C / +100 °C
Schutzart IP65
Prüfnorm UL 514B
UL / CSA-File E140310

TECHNICAL DATA:



Configuration

Frames Polyamide PA66 GF25 V-0
Sealing TPE TPS
Properties
Technology tool-free entry and connection technology for
machines and equipment
Application insertion and sealing of pre-assembled cables
with connectors into housings
Variants of grommets order as accessory from series F311-9xxx-zz,
7 small grommets for cables ØC = 3,0 - 16,0 mm,
9 large grommets for cables ØC = 15,0 - 32,5 mm,
1 small grommet and 1 large grommet closed
Mounting mounting in wall thicknesses from 1,5 to 2,0 mm,
for walls with thicknesses greater than 2,0 mm
the KADL can be attached
Temperature range -30 °C / +100 °C
Protection grade IP65
Test standard UL 514B
UL / CSA-File E140310



Merkmale

Characteristics

Leisten-Set ohne Tüllen Frame set without grommets						Zubehör Accessories			
Bezeichnung Description	Lochmaß Hole size mm	L mm	L1 mm	H mm	H1 mm	Tülle klein Grommet small Stück / Pieces	Tülle groß Grommet large Stück / Pieces		 schwarz black Art.-Nr. / Part No.
KADL 1K/2G	125 x 35	153	63	32,3	8,9	1	2	1	F310-9035-01
KADL 5K	125 x 35	153	63	32,3	8,9	5	0	1	F310-9035-02
KADL 10K	125 x 57,5	153	85,5	32,3	8,9	10	0	1	F310-9057-01
KADL 2K/4G	125 x 80	153	108	32,3	8,9	2	4	1	F310-9080-01
KADL 6K/2G	125 x 80	153	108	32,3	8,9	6	2	1	F310-9080-02
KADL 15K	125 x 80	153	108	32,3	8,9	15	0	1	F310-9080-03
KADL 11K/2G	125 x 102,5	153	130,5	32,3	8,9	11	2	1	F310-9102-01
KADL 20K	125 x 102,5	153	130,5	32,3	8,9	20	0	1	F310-9102-02
KADL 3K/6G	125 x 125	153	153	32,3	8,9	3	6	1	F310-9125-01
KADL 7K/4G	125 x 125	153	153	32,3	8,9	7	4	1	F310-9125-02
KADL 16K/2G	125 x 125	153	153	32,3	8,9	16	2	1	F310-9125-03
KADL 25K	125 x 125	153	153	32,3	8,9	25	0	1	F310-9125-04

