

# GEDA®

## Suspended working platforms




**GEDA®**  
ORIGINAL



▷ Innovations  
▷ Know-how  
▷ Up-to-date production technologies




**GEDA®**  
ORIGINAL

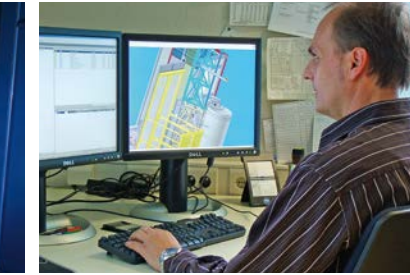


**Control**

- ▷ pluggable control for 1, 2 or 3 motors
- ▷ including power outlet
- ▷ including automatic levelling with limit switch

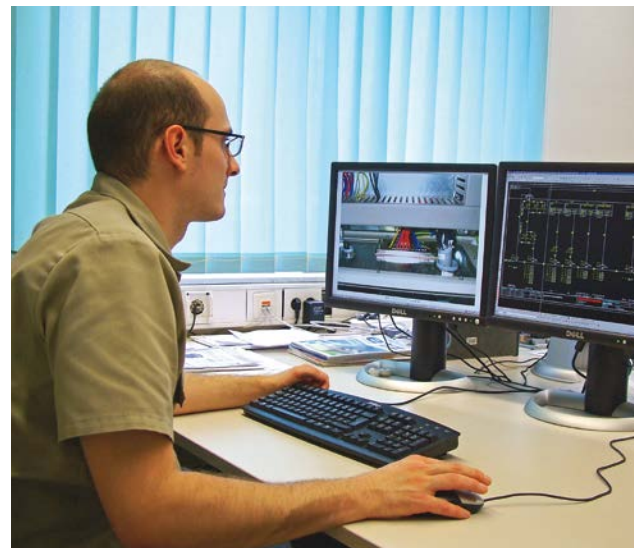

## GEDA®

### World-wide competence

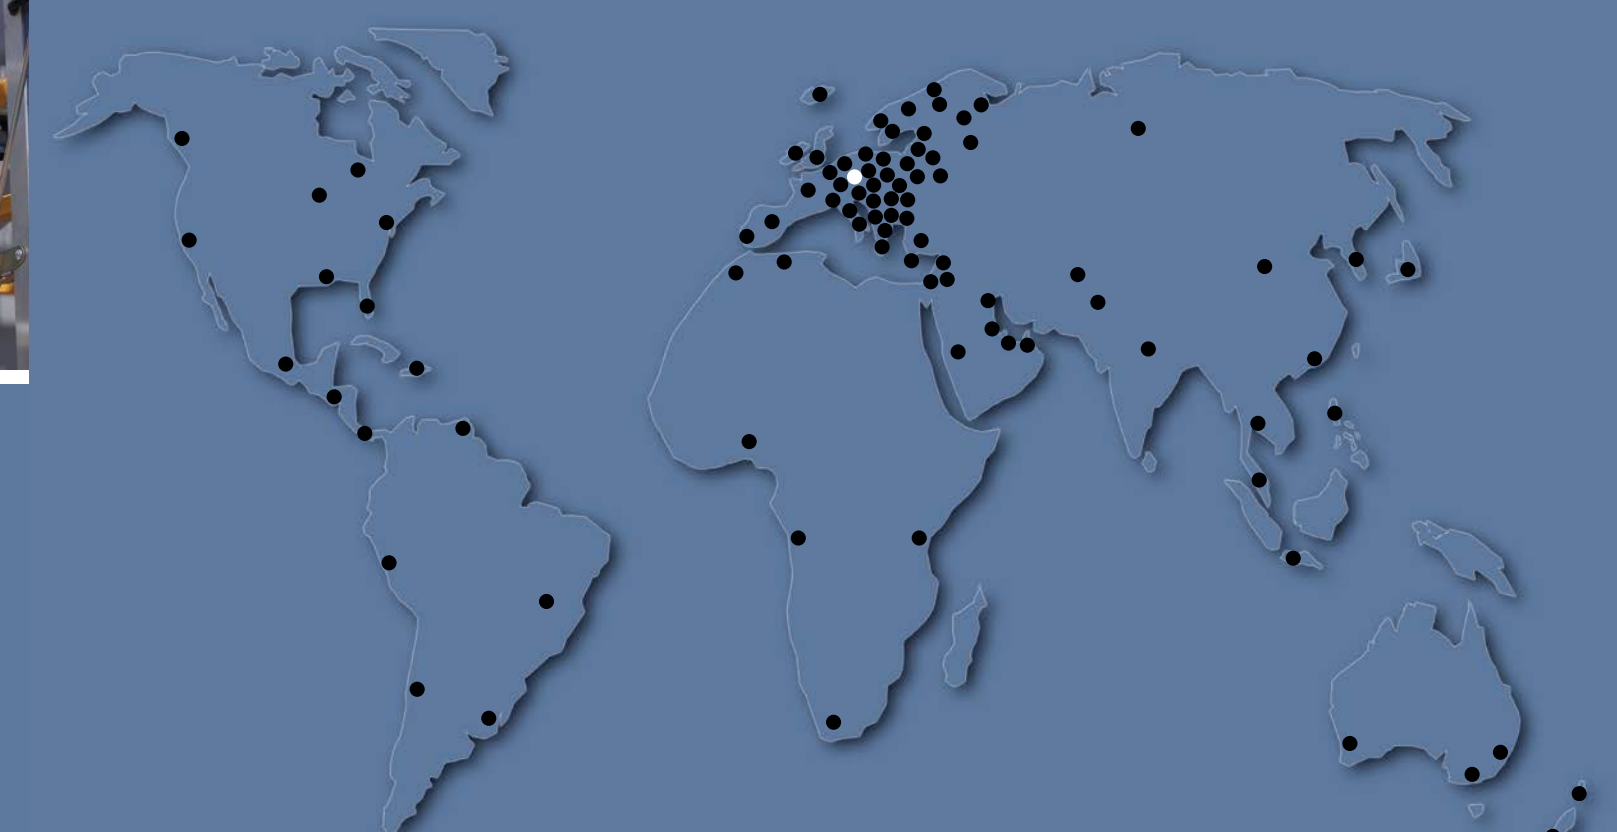

**Compact base unit with convenient supporting frame**

- ▷ overspeed safety device
- ▷ rope breakage safety device



**GEDA®**  
SUSPENDED  
WORKING PLATFORM  
AB 450

**GEDA®**  
SUSPENDED  
WORKING PLATFORM  
AB 650

Your dealer:

**GEDA®**  
ORIGINAL

**GEDA-Dechentreiter GmbH & Co. KG**  
Mertinger Straße 60  
86663 Asbach-Bäumenheim  
Phone +49 (0) 906 9809-0  
Fax +49 (0) 906 9809-50  
info@geda.de  
www.geda.de







Suspended working platforms – the inexpensive scaffold alternative for all construction sites.

► **Winch position**


Lateral suspension:

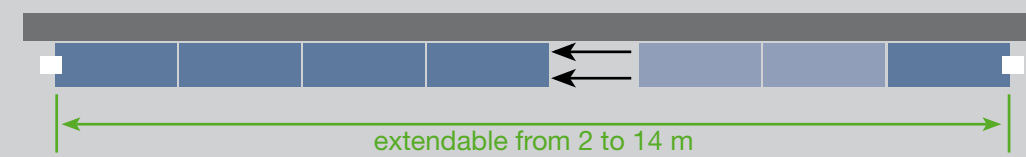

C-bracket + winch

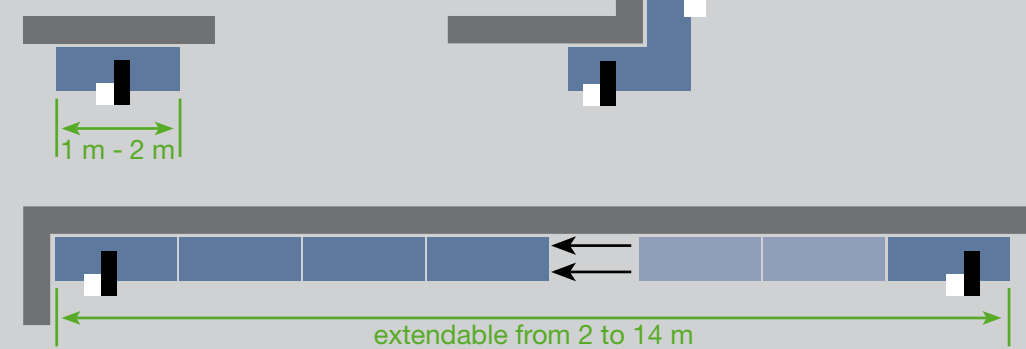


► **Roof boom**

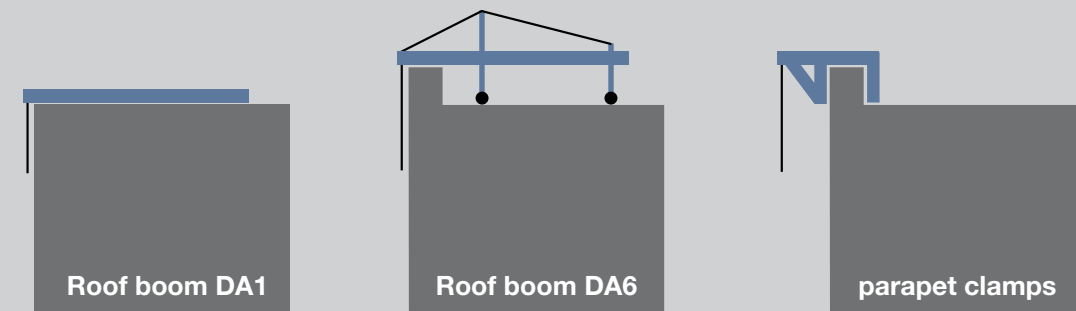

► **Advantages**

- Work at facades and walls irrespective of the building height
- Adjust your working height for ergonomically best working position
- Modular aluminium platform system (segment length 1m/2m/3m)
- pluggable, hot-dip galvanised roof boom modules

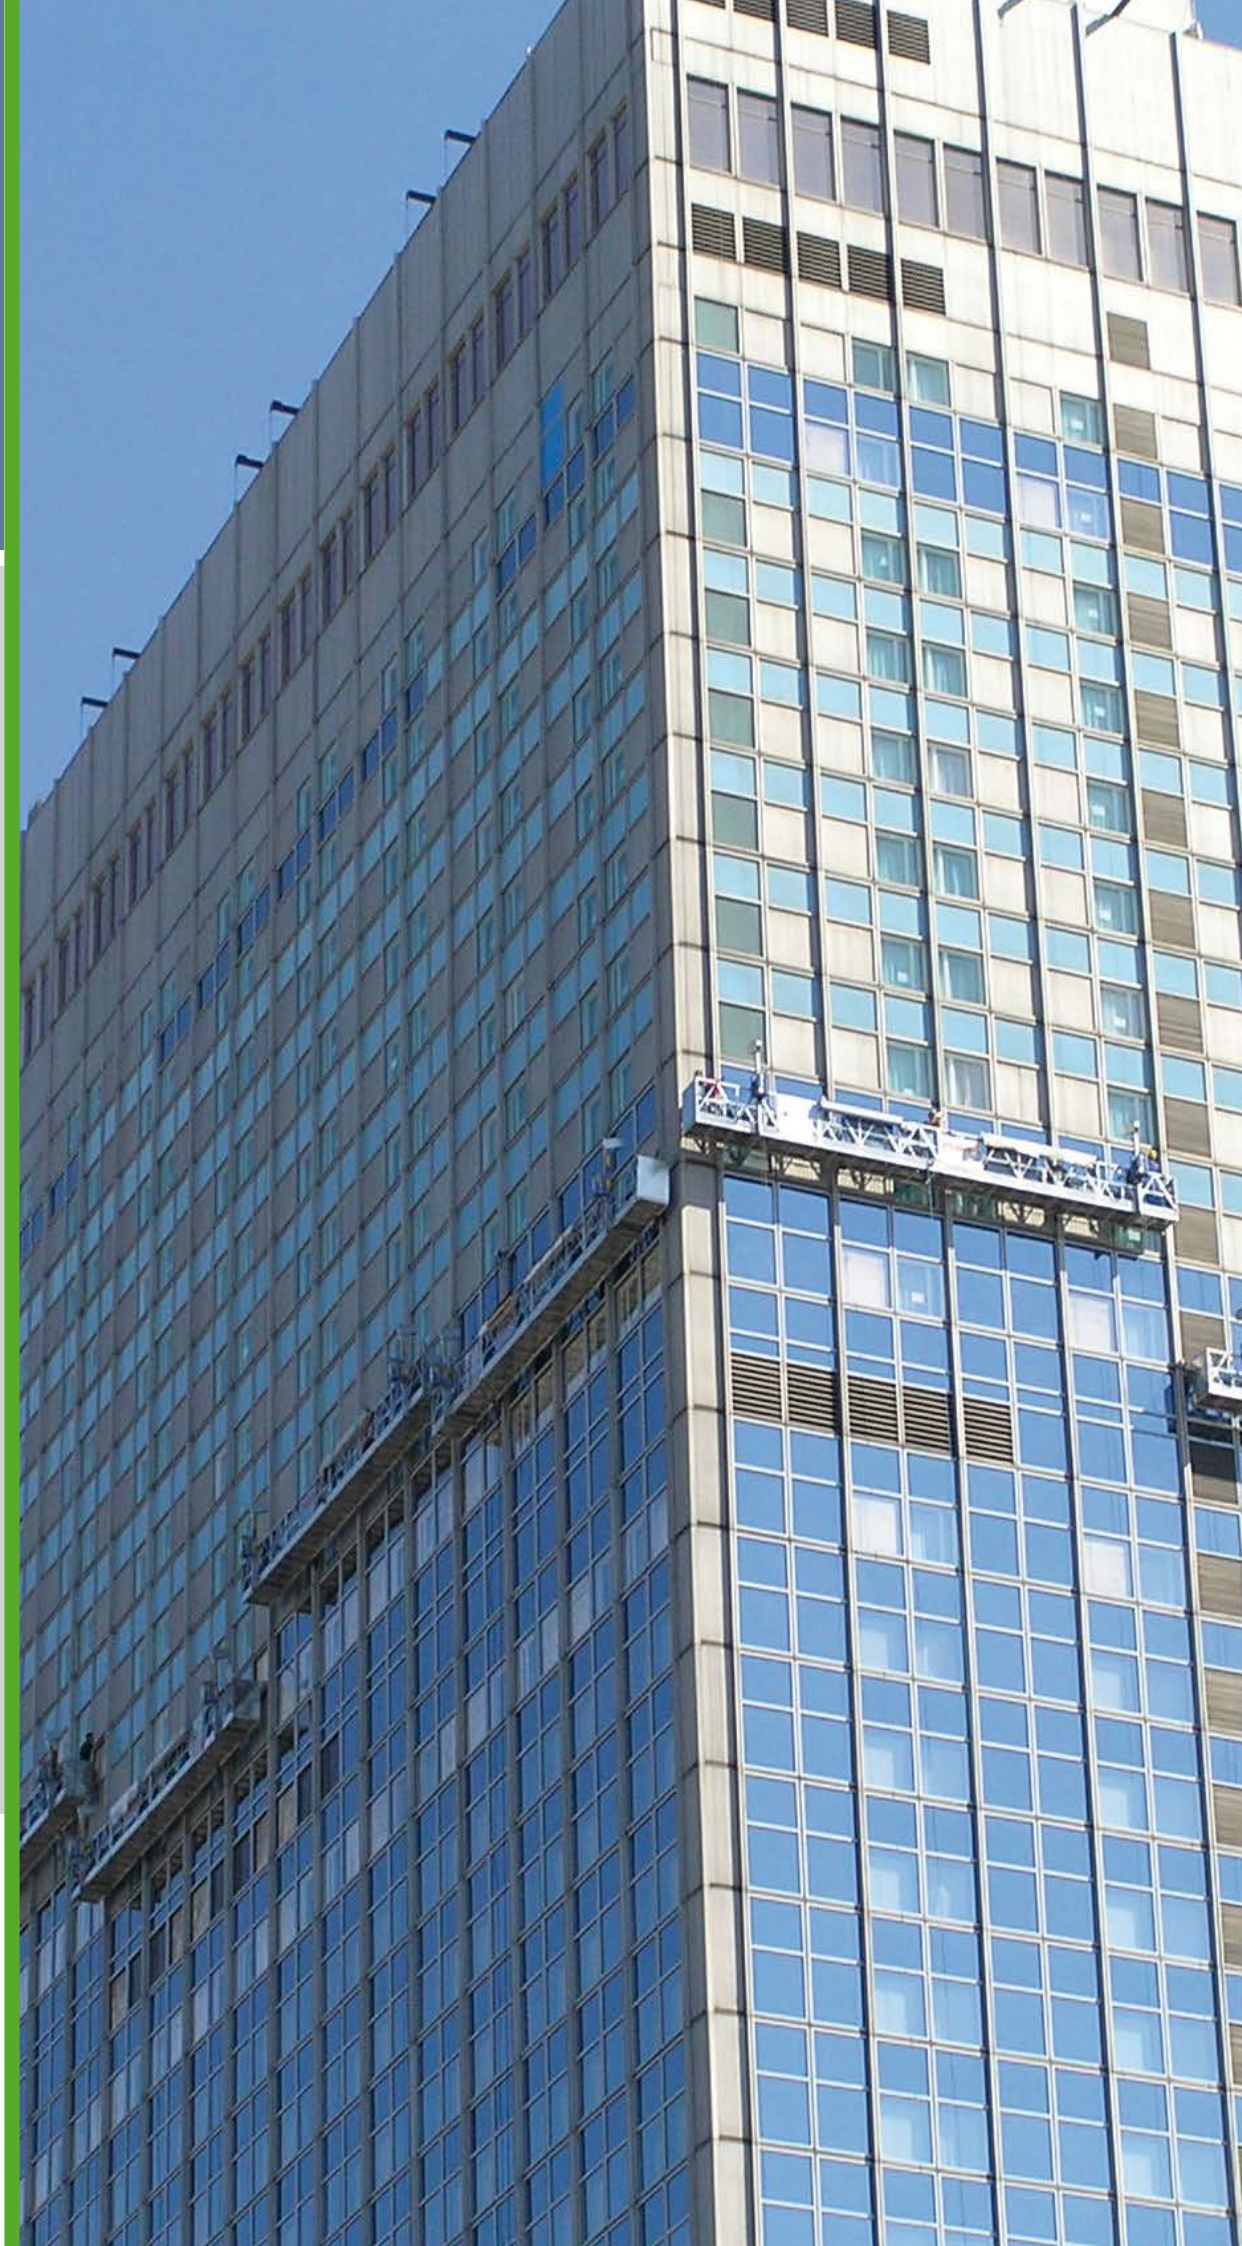

► **Technical data winch**

GEDA AB 450		GEDA AB 450		GEDA AB 650	
Platform length	1 - 14 m	Platform length	1 - 14 m	Platform length	1 - 14 m
Traction force	450 kp	Traction force	450 kp	Traction force	650 kp
Lifting speed	8 m/min.	Lifting speed	8 m/min.	Lifting speed	8 m/min.
Power supply	230 V/50 Hz	Power supply	400 V/50 Hz	Power supply	400 V/50 Hz
Control voltage	48 VAC	Control voltage	48 VAC	Control voltage	48 VAC



Special applications on request!

