


M 25防水透气接头/Waterproof and breathable connector

标准螺牙 Standard screw	线缆范围 Cable area mm	螺纹外径 Thread O.D. mm	螺纹长度 Thread length mm	扳手尺寸 螺母/螺 帽 Spanner size nut / nuts
MG25AL-H2-8	4-8	25	15	33/33
MG25AL-H3-8	4-8	25	15	33/33
MG25AL-H4-7	5-7	25	15	33/33
MG25AL-H5-6	3-6	25	15	33/33

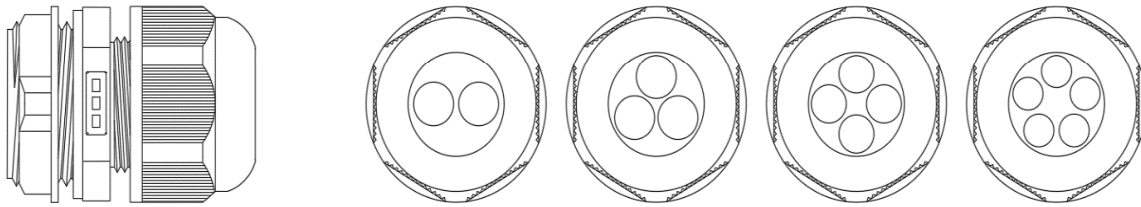

波纹管接头-防水型

Plain screwed adaptor-waterproof type

The hard plate of conduit can reach IP54, soft plate reach IP65

适配软管 suitable conduit	螺牙规格 Screw tooth specification	螺纹外径 external diameter of thread	螺纹长度 length of thread	最小通径 Minimum path	包装 Packing
	德制(German)	mm	mm	mm	pcs
AD10.0	PG7	12.5	8.5	8.5	50
	PG9	15.2	9	8.3	50
AD13.0	PG9	15.2	10	10.4	50
	PG11	18.6	10	11.2	50
AD15.8	PG11	18.6	10	13.7	50
	PG13.5	20.4	10	15.1	50
	PG16	22.5	10.8	14.6	50
AD18.5	PG11	18.6	10	13.7	50
	PG13.5	20.4	10	15.1	50
	PG16	22.5	10.8	14.6	50
AD21.2	PG16	22.5	10	16.1	50
	PG21	28.3	12.5	18.7	50
AD28.5	PG21	28.3	12	23.2	50
AD34.5	PG29	37	12	28.1	20
AD42.5	PG36	47	13	37.3	10
AD54.5	PG48	59.3	16	51.8	10
AD10.0	M12 x 1.5	12	8.5	8	50
	M16 x 1.5	16	10	8	50
	M16 x 1.5	16	10	10.7	50

AD13.0	M16 x 1.5	16	15	11.1	50
	M18 x 1.5	18	10	10.7	50
	M20 x 1.5	20	10	10.4	50
AD15.8	M16 x 1.5	16	10	11.1	50
	M16 x 1.5	16	15	11	50
	M18 x 1.5	18	10	11	50
	M18 x 1.5	18	15	11	50
	M20 x 1.5	20	10	14.5	50
	M20 x 1.5	20	15	14.5	50
	M25 x 1.5	25	12	14.6	50
AD18.5	M16 x 1.5	16	10	11.1	50
	M16 x 1.5	16	15	11	50
	M20 x 1.5	20	10	14.5	50
	M20 x 1.5	20	15	14.5	50
	M25 x 1.5	25	12	14.6	50
AD21.2	M20 x 1.5	20	10	14.6	50
	M20 x 1.5	20	15	14.5	50
	M25 x 1.5	25	10	19.1	50
	M25 x 1.5	25	15	19	50
	M32 x 1.5	32	12	19.1	50
AD25.0	M25 x 1.5	25	10	19.2	50
	M25 x 1.5	25	15	19.2	50
AD28.5	M25 x 1.5	25	10	19.2	50
	M25 x 1.5	25	15	19.2	50
AD34.5	M32 x 1.5	32	10	26.3	20
	M32 x 1.5	32	15	26.3	20
AD42.5	M40 x 1.5	40	15	34.1	10
AD54.5	M50 x 1.5	50	15	41.4	10
	M50 x 1.5	50	22	41.4	10
	M63 x 1.5	63	25	53.6	10