



FEEDER-BOLLARD 300-2

Steel | 1340 mm

Specifications



Cylindrical tube with a circumferential set-on ring in the top section as well as a hemispherical upper closure. Access to the internal circuit via a lockable door, including cable slide. Protection type IP 44.

Mounting

Screw-on inside the bollard

Finish

- Hot-dip galvanised steel ST 37, cast aluminium top, powder coating in standard RAL colours or DB 703
- Standard design with adapter plate without electricity and water connections
- Incl. cable slide (operation possible with the flap closed)
- Equipment to enable electricity and water connections is available on request

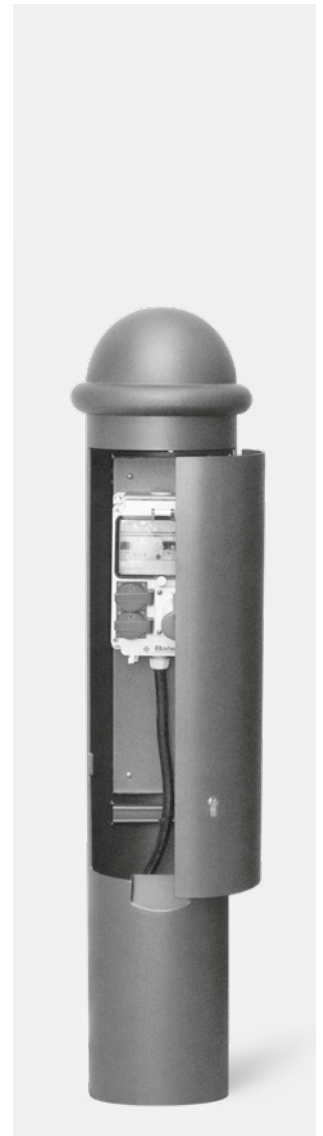

	Fixed mounting
Feeder-Bollard 300-2	300.020



1 FEEDER-BOLLARD 300-2
Daun *Germany*

**2 FEEDER-BOLLARD 300-1/
FEEDER-BOLLARD 300-2**
Mersch *Luxembourg*

