

Many production processes and processing stages require materials to be bonded firmly for limited periods. The bonds must not leave any traces and must not be allowed to damage the material surfaces when the materials are eventually separated.

The adhesion through controlled static charges provides the ideal solution in these cases: the R130A / R131A / EXR130 charging bar is designed for applying the specific charge quantity. High-resistance materials such as paper, cardboard, plastics etc. are interlocked for brief periods or fastened to conductive surfaces, without the need to use adhesives.

The design of the R130A / R131A / EXR130 charging bar allows its use in perfect harmony with the intended purpose. In combination with the Eltex high voltage generator models this effective charging system ensures productivity and quality improvements in the most varied production areas.

The charging bar EXR130 is available for use in the Ex zone.

## Technical Information




F01039y

## R130A / R131A Charging Bar EXR130 Charging Bar

TI-en-3020-2002



## Overview

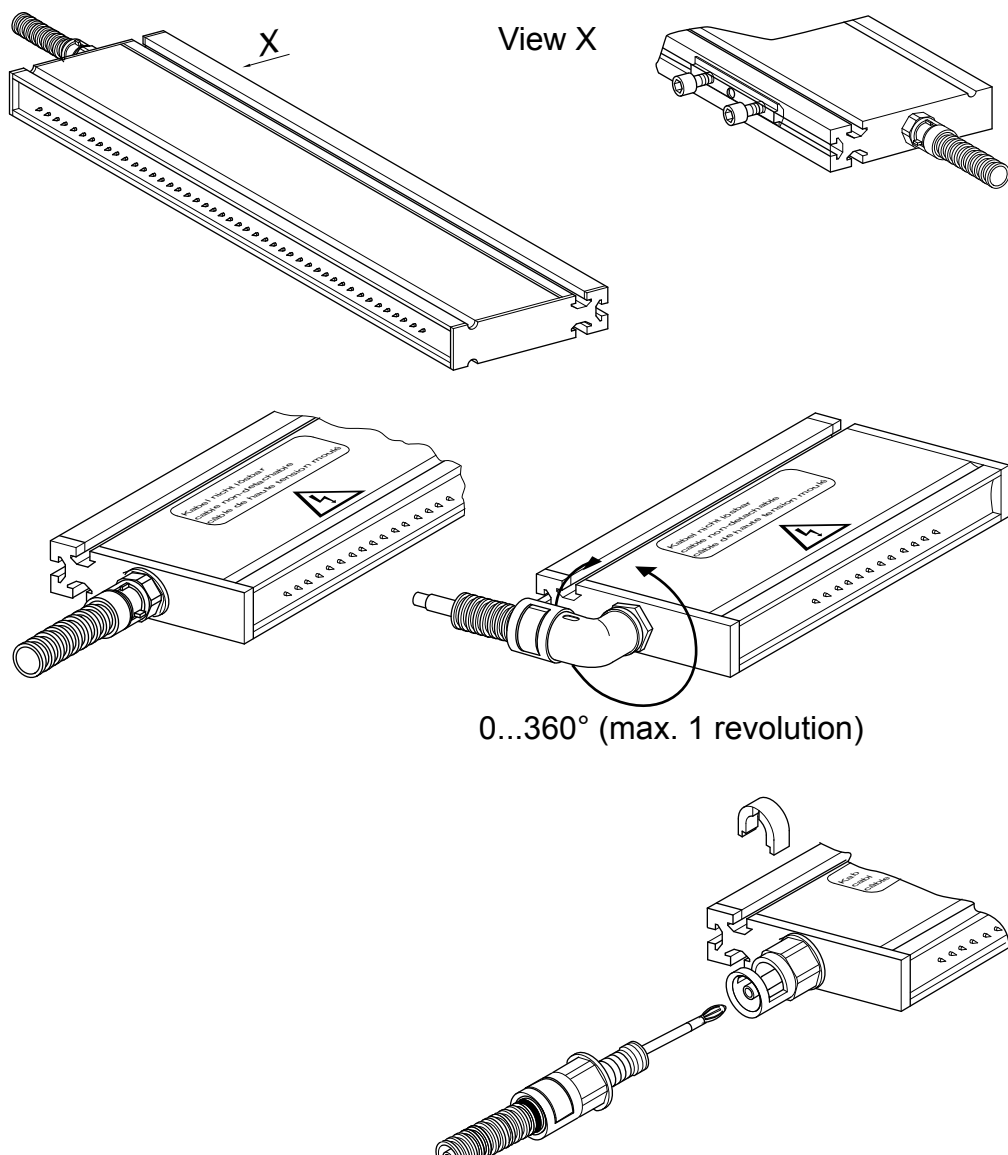

### Bar R130A / EXR130

The connection of the high voltage cable can be axial or at a right angle to the bar.

### Bar R131A

The connection of the high voltage cable is detachable and only available axial to the bar.

## Technical specifications

Bar element	glass-fibre-reinforced plastic GRP
Encapsulation material	polyurethane, UL-94 V0
Emission tips	special alloy
Installation material	plastic or metal sliding nuts
Operating ambient temperature	R130A / R131A: 0...+60°C (+32...+140°F) EXR130: 0...+40°C (+32...+104°F)
Ambient humidity	max. 60% RH, non-dewing
Dimensions	profile: 20 x 80 mm, max. length 3,985 mm, see figure
Weight	approx. 2,1 kg/m
Operating voltage	R130A3 / R131A3: max. ±30 kV R130A6: max. ±60 kV EXR130: max. -30 kV DC/+20 kV DC for voltages higher 60 kV there are special bar designs available
Operating current	typically 1 mA per meter of active bar length
High voltage supply	via Eltex high voltage generators R130A / R131A: series KNH18, KNH35, KNH65 and POWER CHARGER EXR130: series HSG61 and POWER CHARGER
High voltage connection	prefabricated high voltage cable in plastic tube with plug for the high voltage generator, length 1...99 m (standard length 5 m)
EX approval (EXR130)	BAS97ATEX2218X ⊕ II 2G IIB T6 or ⊕ II 3D IIIB T100°C provided that the tips of the bar point downwards and that the flash power of the dust is >0.4 mJ. When used with ESA Electrostatic Printing Assist please observe the safety notices in the respective operating instructions.
UL approval EXR130US R130A3	File No. E81984; Class I, Group D; Class II, Group G; Class III File No. E227156

as shown on  
appliance  
marking:




## Dimensions

AL = Active length  
 GL = Total length  
 EL = Installation length

n whole number,  
 depending on  
 active length

Z 35 mm below 30 kV,  
 60 mm below 60 kV  
 operating voltage

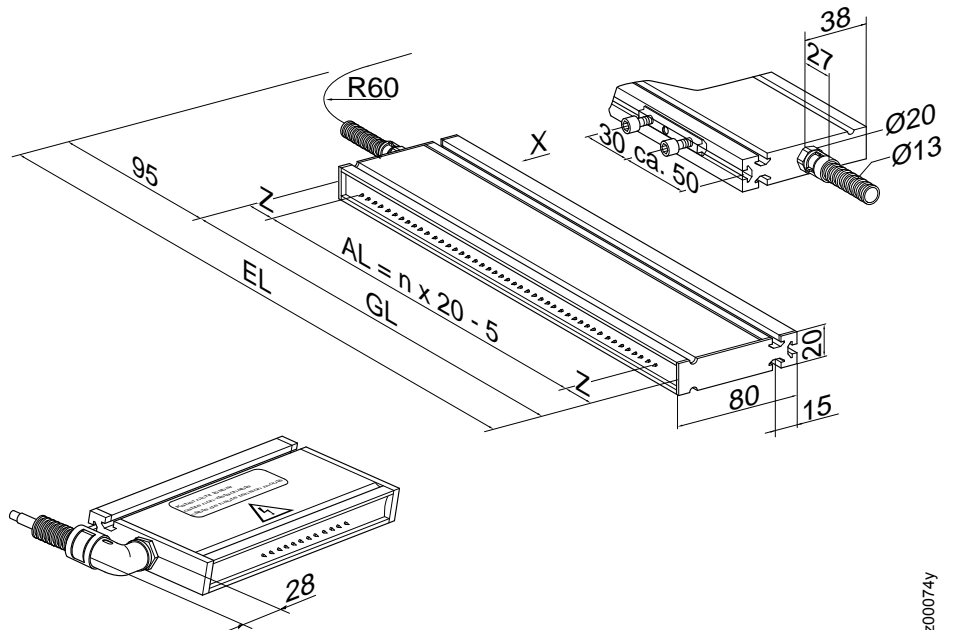

z00074y

## Installation

**A Charging bar profile**  
 with 3 flutings


**B Profile section**  
 Max. bolt depth  
 6,5 mm

Torque:  
 4,0 Nm:  
 metallic screw  
 and sliding nut,  
 0,4 Nm:  
 plastic screw  
 and sliding nut

Secure bolts against  
 working loose  
 (e.g. Loctite 243)

**C Sliding nut**

Total length below 1 meter = 2 off  
 Total length below 2 meters = 3 off  
 Total length below 3 meters = 4 off  
 Total length below 4 meters = 5 off

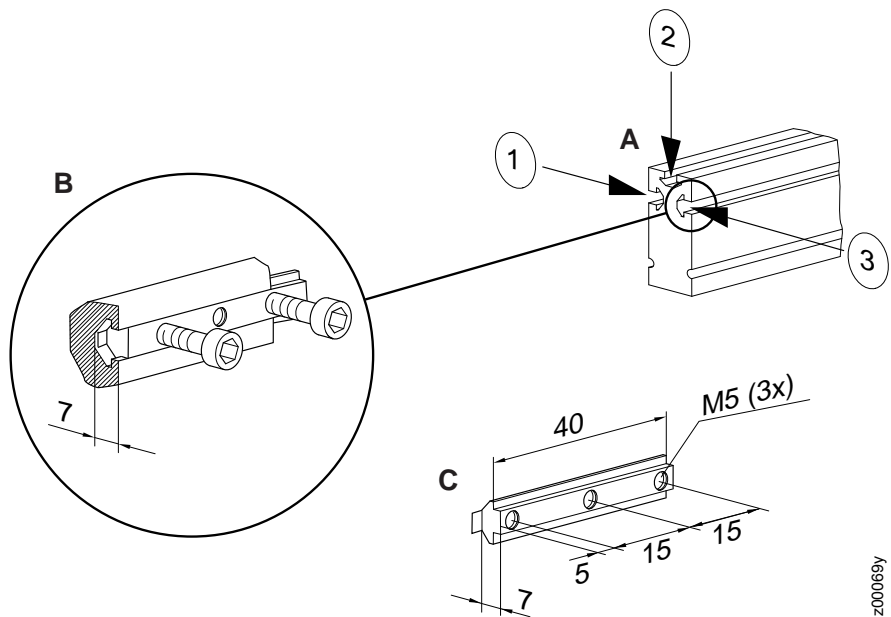

z00069y



Eltex-Elektrostatik-Gesellschaft mbH  
 Blauenstraße 67-69  
 79576 Weil am Rhein | Germany  
 Telephone +49 (0) 76 21 / 79 05 - 422  
 eMail info@eltex.de  
 Internet www.eltex.de