



Doruk 20/22

S/P/M

Duvar Tipi Teşhir Reyonu
Refrigerated Wall Cabinet

TR

- Çalışma sıcaklığı M1 (-1/+5), M2 (-1/+7) & H1 (-1/+10) ısı sınıfı
- Sadece dıştan motorlu versiyon mevcut
- Ada şeklinde kurulum olanağı
- Geniş teşhir alanı ve tava
- Plastik koruyucu tampon
- Manuel ve motorlu gece perdesi seçenekleri
- Üstte standart tek sıra LED aydınlatma
- Raflarda LED aydınlatma seçeneği
- Açılı 400 mm, 420 mm, 450 mm ve 500 mm raf seçenekleri
- Elektrostatik boyalı ve paslanmaz raf seçenekleri
- Aynalı ve camlı yan kapak seçenekleri
- Raflar arası homojen hava dağılımı
- RAL renk seçenekleri
- Reyon başı seçenekleri

EN

- Available for M1 (-1/+5), M2 (-1/+7), H1 (-1/+10) temp. class
- Only remote version available
- Possibility to assemble as an island type
- Wide display area and base tray
- Plastic bumper protection
- Manuel, driven & master night curtain options
- Standard LED single row canopy lighting
- Optional LED under shelves lighting
- Inclined shelves with 400 mm, 420 mm, 450 mm, 500 mm, 600 mm length options
- Powder coated or stainless steel options for shelves
- Internally mirrored or glazed sidewalls
- Equal air flow between display shelves
- RAL color options
- Head unit options



COLD SECTION



REMOTE



DAIRY



MEAT



CHICKEN



PRE-PACKED FISH



PRE-PACKED MEAT



CHEESE




FRUITS & VEGETABLES




PRE-PACKED FRUITS & VEGETABLES




DRINKS

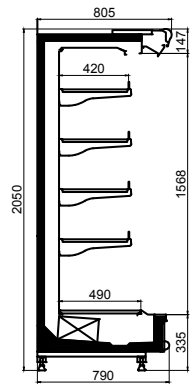


DORUK 20 S / P OA

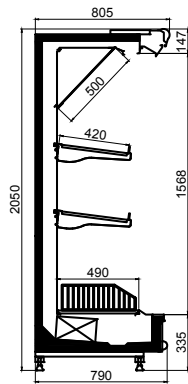


DORUK 20 M OA

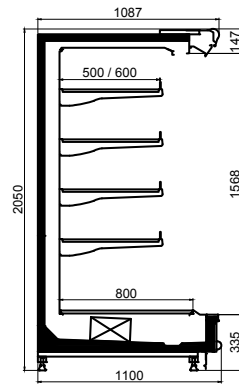


DORUK 20 S / P 2A

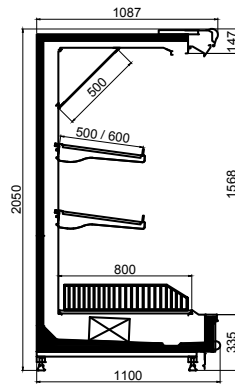


DORUK 20 M 2A

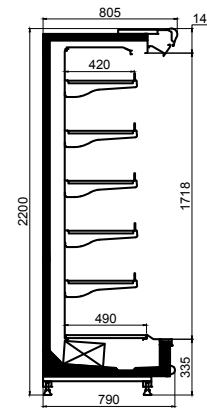


DORUK 22 S / P OA

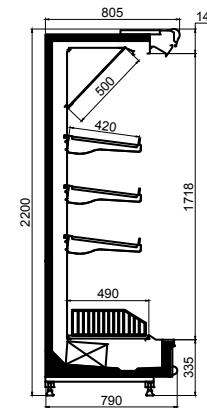


DORUK 22 M OA

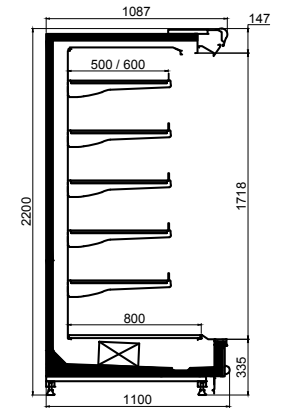


DORUK 22 S / P 2A

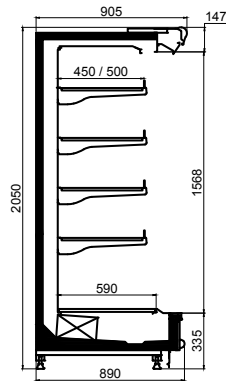


DORUK 20 S / P 1A

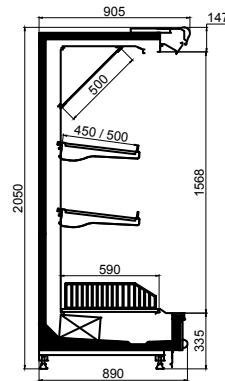


DORUK 20 M 1A

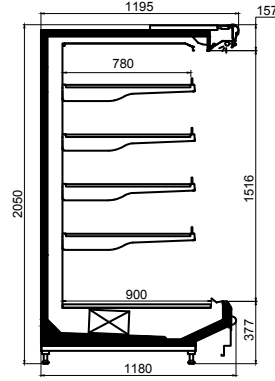


DORUK 20 S / P 3A

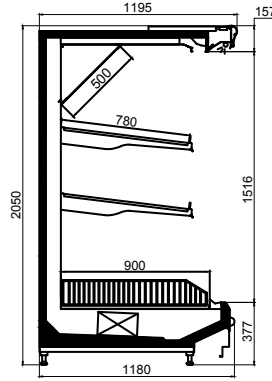


DORUK 20 M 3A

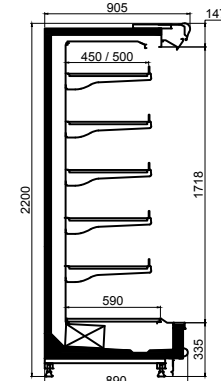


DORUK 22 S / P 1A

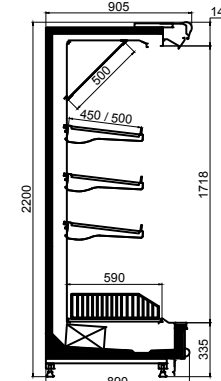


DORUK 22 M 1A

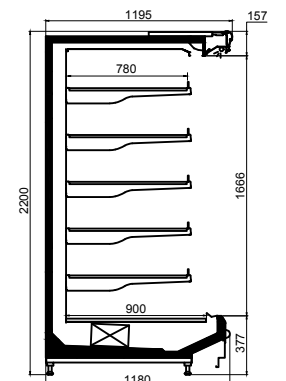


DORUK 22 S / P 3A

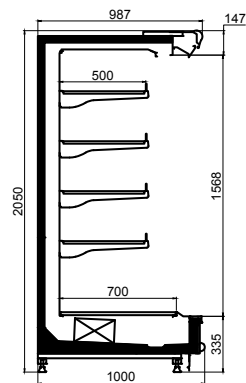


DORUK 20 S / P 15A

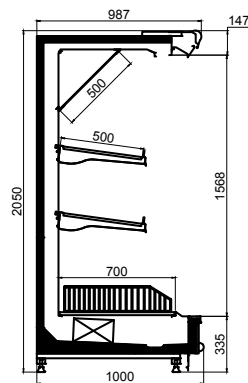

DORUK 20 M 15A

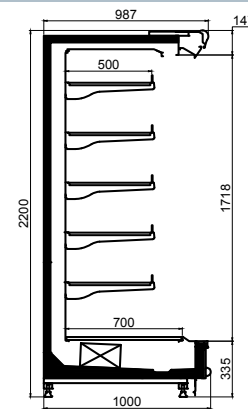


DORUK 22 S / P 15A

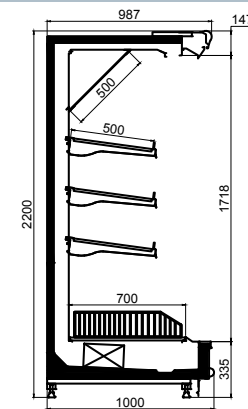


DORUK 22 M 15A

TEKNİK ÖZELLİKLER TECHNICAL SPECIFICATIONS

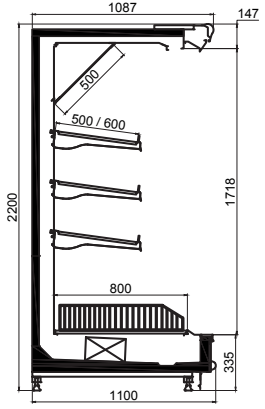

DORUK 22 M 2A

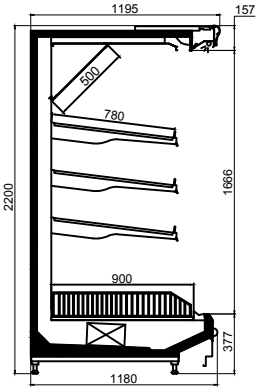

DORUK 22 M 3A

	ÖLÇÜ BİRİMLERİ MEASUREMENTS	UZUNLUK LENGTH mm	DORUK 20 S_A					DORUK 20 P_A					DORUK 20 M_A				
			0	1	15	2	3	0	1	15	2	3	0	1	15	2	3
DERİNLİK DEPTH			0	1	15	2	3	0	1	15	2	3	0	1	15	2	3
ÇALIŞMA SICAKLIĞI OPERATING TEMPERATURE	°C		M2 (-1/ +7°C)					M1 (-1/ +5°C)					H1 (+1/ +10°C)				
RAF TEŞHİR ALANI (RAF + TABAN) SHELF DISPLAY AREA (SHELF + TRAY)	m ²	937	1.99	2.25	2.53	2.6	3.85	1.99	2.25	2.53	2.6	3.85	1.19	1.35	1.51	1.66	3.1
		1250	2.65	3.0	3.37	3.5	5.12	2.65	3.0	3.37	3.5	5.12	1.59	1.8	2.02	2.19	4.12
		1875	3.98	4.5	5.0	5.2	7.69	3.98	4.5	5.0	5.2	7.69	2.39	2.7	3.03	3.32	6.18
		2500	5.31	6.0	6.75	7.0	10.25	5.31	6.0	6.75	7.0	10.25	3.27	3.7	4.16	4.44	8.25
		3125	6.64	7.5	8.4	8.8	12.81	6.64	7.5	8.4	8.8	12.81	4.07	4.6	5.17	5.54	10.31
		3750	7.96	9.0	10.12	10.5	15.38	7.96	9.0	10.12	10.5	15.38	4.96	5.6	6.3	6.66	12.38
YAN KAPAK KALINLIĞI SIDE WALL THICKNESS	mm	40 x 2															
ÇEVRE SICAKLIĞI - SINIF AMBIENT TEMP. - UNIT CLASS	°C	EN ISO 23953-2 / CLASSE 3 - 25°C / %60 RH															



	ÖLÇÜ BİRİMLERİ MEASUREMENTS	UZUNLUK LENGTH mm	DORUK 22 S_A					DORUK 22 P_A					DORUK 22 M_A				
			0	1	15	2	3	0	1	15	2	3	0	1	15	2	3
DERİNLİK DEPTH			0	1	15	2	3	0	1	15	2	3	0	1	15	2	3
ÇALIŞMA SICAKLIĞI OPERATING TEMPERATURE	°C		M2 (-1/ +7°C)					M1 (-1/ +5°C)					H1 (+1/ +10°C)				
RAF TEŞHİR ALANI (RAF + TABAN) SHELF DISPLAY AREA (SHELF + TRAY)	m ²	937	2.13	2.52	2.83	3.09	4.6	2.13	2.52	2.83	3.09	4.6	1.32	2.14	2.4	2.60	3.1
		1250	2.85	3.36	3.78	4.13	6.13	2.85	3.36	3.78	4.13	6.13	1.77	2.86	3.2	3.475	4.13
		1875	4.27	5.04	5.67	6.19	9.19	4.27	5.04	5.67	6.19	9.19	2.65	4.29	4.82	5.21	6.19
		2500	5.69	6.72	7.56	8.25	12.25	5.69	6.72	7.56	8.25	12.25	3.53	5.72	6.43	6.95	8.25
		3125	7.12	8.4	9.45	10.32	15.32	7.12	8.4	9.45	10.32	15.32	4.42	7.15	8.0	8.68	10.31
		3750	8.54	10.08	11.34	12.375	18.38	8.54	10.08	11.34	12.375	18.38	4.30	8.58	9.65	10.43	12.38
YAN KAPAK KALINLIĞI SIDE WALL THICKNESS	mm	40 x 2															
ÇEVRE SICAKLIĞI - SINIF AMBIENT TEMP. - UNIT CLASS	°C	EN ISO 23953-2 / CLASSE 3 - 25°C / %60 RH															



Ürettiğimiz ürünlerde önceden haber vermeksizin değişiklik yapma, hakkımız saklıdır.
We reserve the right of modification for our products without any previous notice.