

Technical data sheet

Fire protection duct I120/E90, internal height 50 mm

Item no. 7215210



Fire protection duct I120/E90, to DIN 4102 part 11 and part 12, including 12 x countersunk head screws and 3 x 1 m sealing strip.




Glass-fibre lightweight concrete

Product text, scope of delivery | 12x countersunk head screws, 3x 1 m sealing strips

Master data

Item no.	7215210
Type	BSK 120506
Description 1	Fire protection duct I120/E90
Dimension	50x60
Colour	Grey
Material	Glass-fibre lightweight concrete
Smallest sales unit	1,00 m
Weight	1.490,00 kg/100 m

Technical data

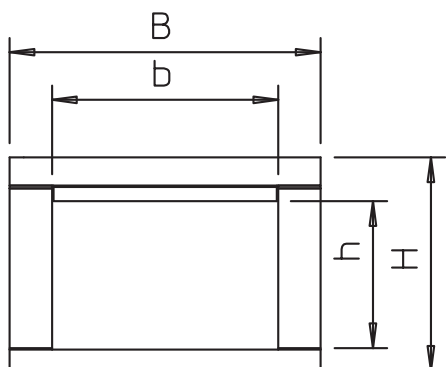

Length	1.000,00 mm
Internal dimensions	50x60 mm
External dimensions	130x180 mm
Dimension B	180,00 mm
Dimension H	130,00 mm
Dimension b	60,00 mm
Dimension h	50,00 mm
Number of flammable sides	4
Fire resistance class E – function maintenance	90,00
Fire resistance class I – installation duct	120,00
With perforation	<input type="checkbox"/>
Partitions possible	<input type="checkbox"/>
Jacketing	Without
Material of the insulation	Glass-fibre lightweight concrete