


# Zubehör / Accessories



## wege® K Blindstopfen rund / Plugs round

**Material** PA 6 GF  
**Farbe** lichtgrau (RAL 7035)  
**Schutzklasse** IP54  
**Temperaturbereich** -30 °C bis +100 °C

**material** PA 6 GF  
**colour** light grey (RAL 7035)  
**protection class** IP54  
**range of temperature** -30 °C to +100 °C



Gewinde thread	D	H	L		Bestell-Nr. ref.-number
M 12 x 1,5	17	3	6	100	772.1200.0
M 16 x 1,5	22	4	6	100	772.1600.0
M 20 x 1,5	25,5	4	6	100	772.2000.0
M 25 x 1,5	31	4,5	7	100	772.2500.0
M 32 x 1,5	37	4,5	8	100	772.3200.0
M 40 x 1,5	46	3,5	9	50	772.4000.0
M 50 x 1,5	60	5	10	25	772.5000.0
M 63 x 1,5	75	6	12	25	772.6300.0

Pg 7	15	2	6	100	771.0700.0
Pg 9	19	3	6,5	100	771.0900.0
Pg 11	22	3,5	6,5	100	771.1100.0
Pg 13,5	25	3,5	6,5	100	771.1300.0
Pg 16	27	3,5	6,5	100	771.1600.0
Pg 21	33	4	8	100	771.2100.0
Pg 29	44	3,5	8	50	771.2900.0
Pg 36	55	4	10	25	771.3600.0
Pg 42	61,5	4	10	25	771.4200.0
Pg 48	68	4	12	25	771.4800.0

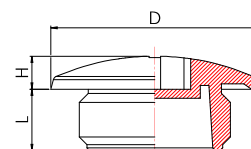


# Zubehör / Accessories

## wege® K Blindstopfen rund / Plugs round

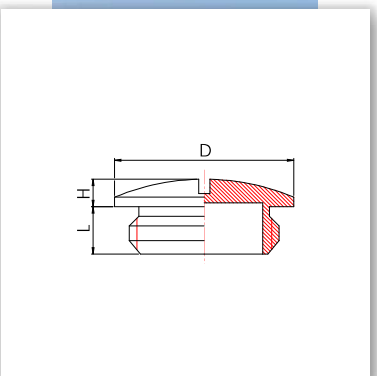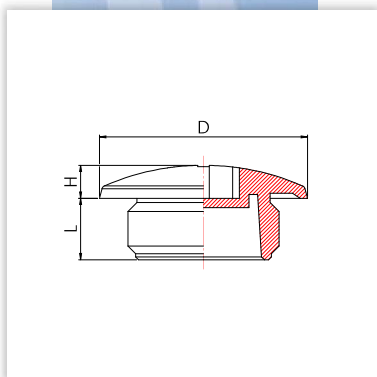

<b>Material</b>	PA 6 GF
<b>Farbe</b>	tiefschwarz (RAL 9005)
<b>Schutzklasse</b>	IP54
<b>Temperaturbereich</b>	-30 °C bis +100 °C


<b>material</b>	PA 6 GF
<b>colour</b>	jet black (RAL 9005)
<b>protection class</b>	IP54
<b>range of temperature</b>	-30 °C to +100 °C

Gewinde thread	D	H	L		Bestell-Nr. ref.-number
M 12 x 1,5	17	3	6	100	772.1200.3
M 16 x 1,5	22	4	6	100	772.1600.3
M 20 x 1,5	25,5	4	6	100	772.2000.3
M 25 x 1,5	31	4,5	7	100	772.2500.3
M 32 x 1,5	37	4,5	8	100	772.3200.3
M 40 x 1,5	46	3,5	9	50	772.4000.3
M 50 x 1,5	60	5	10	25	772.5000.3
M 63 x 1,5	75	6	12	25	772.6300.3
Pg 7	15	2	6	100	771.0700.3
Pg 9	19	3	6,5	100	771.0900.3
Pg 11	22	3,5	6,5	100	771.1100.3
Pg 13,5	25	3,5	6,5	100	771.1300.3
Pg 16	27	3,5	6,5	100	771.1600.3
Pg 21	33	4	8	100	771.2100.3
Pg 29	44	3,5	8	50	771.2900.3
Pg 36	55	4	10	25	771.3600.3
Pg 42	61,5	4	10	25	771.4200.3
Pg 48	68	4	12	25	771.4800.3

# Zubehör / Accessories

## wege® K Blindstopfen rund / Plugs round


<b>Material</b>	PA 6 GF	<b>material</b>	PA 6 GF
<b>Farbe</b>	lichtgrau (RAL 7035)	<b>colour</b>	light grey (RAL 7035)
<b>O-Ring</b>	NBR-Oz	<b>o-ring</b>	NBR-Oz
<b>Schutzklasse</b>	IP66/ IP68 – 5 bar/ IP69k	<b>protection class</b>	IP66/ IP68 – 5 bar/ IP69k
<b>Temperaturbereich</b>	-30 °C bis +100 °C	<b>range of temperature</b>	-30 °C to +100 °C


Gewinde thread	D	H	L		Bestell-Nr. ref.-number
M 12 x 1,5	17	3	6	100	775.1200.0
M 16 x 1,5	22	4	6	100	775.1600.0
M 20 x 1,5	25,5	4	6	100	775.2000.0
M 25 x 1,5	31	4,5	7	100	775.2500.0
M 32 x 1,5	37	4,5	8	100	775.3200.0
M 40 x 1,5	46	3,5	9	50	775.4000.0
M 50 x 1,5	60	5	10	25	775.5000.0
M 63 x 1,5	75	6	12	25	775.6300.0



## wege® K Blindstopfen rund / Plugs round

<b>Material</b>	PA 6 GF	<b>material</b>	PA 6 GF
<b>Farbe</b>	tiefschwarz (RAL 9005)	<b>colour</b>	jet black (RAL 9005)
<b>O-Ring</b>	NBR-Oz	<b>o-ring</b>	NBR-Oz
<b>Schutzklasse</b>	IP66/ IP68 – 5 bar/ IP69k	<b>protection class</b>	IP66/ IP68 – 5 bar/ IP69k
<b>Temperaturbereich</b>	-30 °C bis +100 °C	<b>range of temperature</b>	-30 °C to +100 °C

Gewinde thread	D	H	L		Bestell-Nr. ref.-number
M 12 x 1,5	17	3	6	100	775.1200.3
M 16 x 1,5	22	4	6	100	775.1600.3
M 20 x 1,5	25,5	4	6	100	775.2000.3
M 25 x 1,5	31	4,5	7	100	775.2500.3
M 32 x 1,5	37	4,5	8	100	775.3200.3
M 40 x 1,5	46	3,5	9	50	775.4000.3
M 50 x 1,5	60	5	10	25	775.5000.3
M 63 x 1,5	75	6	12	25	775.6300.3

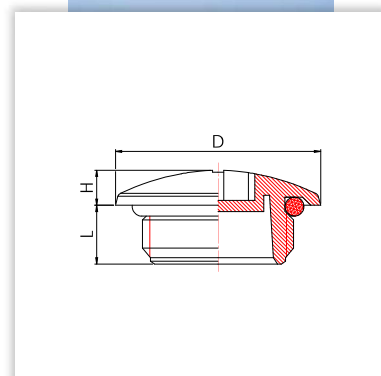


## Zubehör / Accessories


### wege® K Blindstopfen rund / Plugs round

<b>Material</b>	PS
<b>Farbe</b>	lichtgrau (RAL 7035)
<b>Schutzklasse</b>	IP54
<b>Temperaturbereich</b>	-30 °C bis +110 °C

<b>material</b>	PS
<b>colour</b>	light grey (RAL 7035)
<b>protection class</b>	IP54
<b>range of temperature</b>	-30 °C to +110 °C



Gewinde thread	D	H	L		Bestell-Nr. ref.-number
Pg 7	15	2	6	100	770.0700.0
Pg 9	19	3	6,5	100	770.0900.0
Pg 11	22	3,5	6,5	100	770.1100.0
Pg 13,5	25	3,5	6,5	100	770.1300.0
Pg 16	27	3,5	6,5	100	770.1600.0
Pg 21	33	4	8	100	770.2100.0
Pg 29	44	3,5	8	50	770.2900.0
Pg 36	55	4	10	25	770.3600.0
Pg 42	61,5	4	10	25	770.4200.0
Pg 48	68	4	12	25	770.4800.0

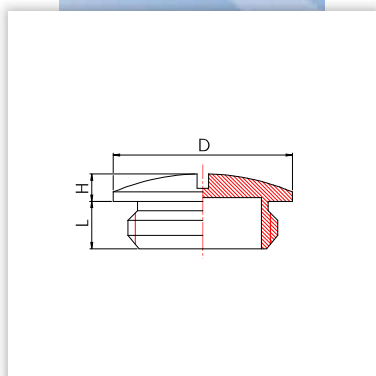


### wege® K Blindstopfen rund / Plugs round

<b>Material</b>	PS
<b>Farbe</b>	tiefschwarz (RAL 9005)
<b>Schutzklasse</b>	IP54
<b>Temperaturbereich</b>	-30 °C bis +110 °C

<b>material</b>	PS
<b>colour</b>	jet black (RAL 9005)
<b>protection class</b>	IP54
<b>range of temperature</b>	-30 °C to +110 °C



Gewinde thread	D	H	L		Bestell-Nr. ref.-number
Pg 7	15	2	6	100	770.0700.3
Pg 9	19	3	6,5	100	770.0900.3
Pg 11	22	3,5	6,5	100	770.1100.3
Pg 13,5	25	3,5	6,5	100	770.1300.3
Pg 16	27	3,5	6,5	100	770.1600.3
Pg 21	33	4	8	100	770.2100.3
Pg 29	44	3,5	8	50	770.2900.3
Pg 36	55	4	10	25	770.3600.3
Pg 42	61,5	4	10	25	770.4200.3
Pg 48	68	4	12	25	770.4800.3