

PI-100 series



Dimensions

DATA IN mm

| | PI-100 F | PI-100 P |
|----------|----------|----------|
| A | 288 | 288 |
| B | 313 | 367 |
| C | 109 | 109 |
| D | - | 480 |

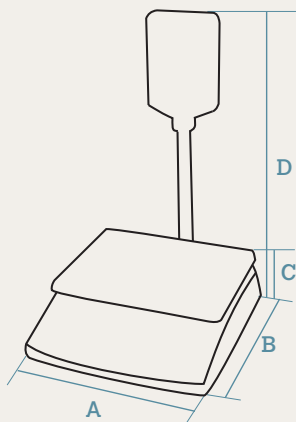


Plate dimensions: L263 x W204 mm.

Packaging measures:

- › PI-100 F: L345 x W370 x H195 mm.
- › PI-100 P: L340 x W510 x H195 mm.

Packaging weight:

- › PI-100 F: 4.1 kg / PI-100 P: 4.7 kg.



Cely PI
SERIES



LCD
SEGMENT
DISPLAY



UP TO
10 PLUs



RS-232



RECHARGEABLE
INTERNAL
BATTERY



METROLOGICAL
VERIFICATION
OPTIONAL (EU)

Characteristics and functionality

Main characteristics

- Price computing electronic scale without printer.
- Rechargeable internal battery:
 - Up to 60 hours' runtime with battery at full charge and backlight off (approximate data).
- Valid for legal metrology.

Features

- Fix tare.
- Manual zero.
- 10 PLUs in memory - 4 direct PLUs.
- Energy saving via programmable on and off back lighting switching.
- Operating temperature: -10°C to + 40°C.

Capacity / Accuracy

- Multi-interval:
 - 3 kg / 1 g - 6 kg / 2 g.
 - 6 kg / 2 g - 15 kg / 5 g.
 - 15 kg / 5 g - 30 kg / 10 g.

Available formats

- Flat.
- Pole.

Models

Flat Format

| | Displays | PLUs | Direct PLUs | Power | Capacity/Accuracy | Reference |
|----------------|--------------|------|-------------|-----------------|----------------------------|----------------|
| PI-100 F 3/6 | LCD Segments | 10 | 4 | Mains / Battery | 3 kg / 1 g - 6 kg / 2 g | 71AI10_S0028__ |
| PI-100 F 6/15 | LCD Segments | 10 | 4 | Mains / Battery | 6 kg / 2 g - 15 kg / 5 g | 71AI10_S0029__ |
| PI-100 F 15/30 | LCD Segments | 10 | 4 | Mains / Battery | 15 kg / 5 g - 30 kg / 10 g | 71AI10_S0031__ |

Pole Format

| | Displays | PLUs | Direct PLUs | Power | Capacity/Accuracy | Reference |
|----------------|--------------|------|-------------|-----------------|----------------------------|-----------------|
| PI-100 P 3/6 | LCD Segments | 10 | 4 | Mains / Battery | 3 kg / 1 g - 6 kg / 2 g | 71AI10_T0028__ |
| PI-100 P 6/15 | LCD Segments | 10 | 4 | Mains / Battery | 6 kg / 2 g - 15 kg / 5 g | 71AI10_T0029__ |
| PI-100 P 15/30 | LCD Segments | 10 | 4 | Mains / Battery | 15 kg / 5 g - 30 kg / 10 g | 71AI100_T0031__ |

(M) optional

Options

| Option | Characteristics | Ref. |
|-------------------------------|--|---------|
| Metrological verification (M) | According to EU weighing directives. (See section on equipment metrological verification). | Consult |

Accessories

DB9-DB9 cable

RS-232 communications cable.



Ref: WI6371BAA

Construction

- Structure:
 - ABS plastic casing.
- Display:
 - 3 backlit LCD segment displays in vendor side and buyer side.
 - 6 digits (H15 mm) per display.
 - Show weight, price / kg and total.
- Keypad with 20 keys.
- Stainless steel plate.

Communication to PC / POS / ECR

- RS-232.
 - Protocols available to connect to most of the POS/ECR in the market.

Power supply

- Mains: AC 12 V / 500 mA adapter.
- Rechargeable internal battery: Pb 6 V / 3.2 Ah.

Note:
- The references correspond to standard models: Black ABS plastic casing, backlit LCD segment displays and flat stainless steel plate.