

Wide-Angle Ultrafast Laserline Mirror

Coating code: 515UFWA

Coating specification: R > 99.9% @ 500-530nm, AOI 0-45°


GDD: |GDD Rs @ 0°| < 20 fs²

LDT:

> 0.15 J/cm², 515 nm, 500 fs, 10 kHz, p-pol; 45deg

> 0.3 J/cm², 515 nm, 500 fs, 10 kHz, s-pol; 45deg

> 0.12 J/cm², 515 nm, 500 fs, 10 kHz; 0deg

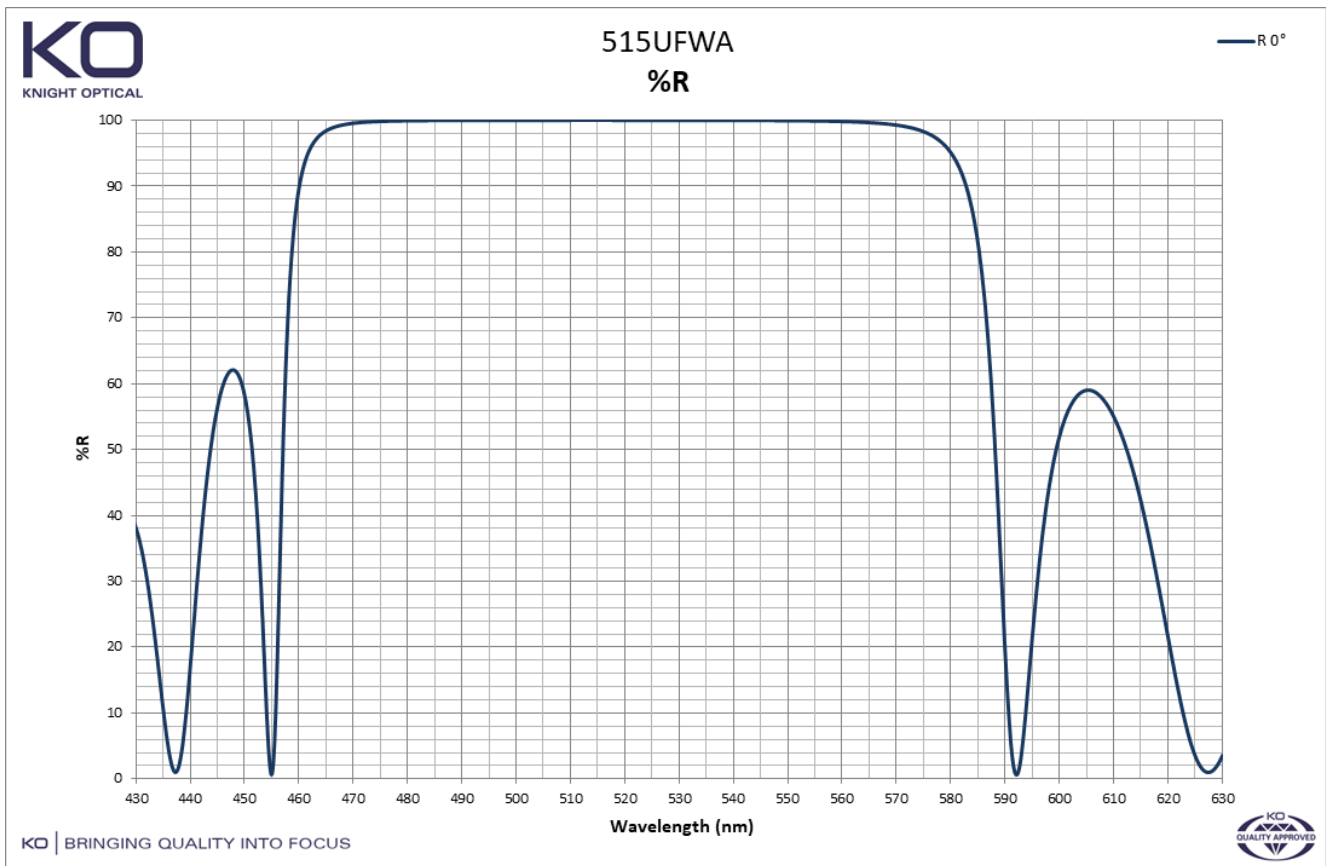

Wide-Angle Ultrafast Laserline Mirror

Coating code: 515UFWA

Coating specification: R > 99.9% @ 500-530nm, AOI 0-45°

GDD: |GDD Rs @ 0°| < 20 fs²

LDT:

> 0.15 J/cm², 515 nm, 500 fs, 10 kHz, p-pol; 45deg

> 0.3 J/cm², 515 nm, 500 fs, 10 kHz, s-pol; 45deg

> 0.12 J/cm², 515 nm, 500 fs, 10 kHz; 0deg

