

Kabelverschraubungen / Cable Glands

wege® M Classic ZZ / Strain relief



Material	Messing vernickelt
Schrauben	Edelstahl
Dichtring	<ul style="list-style-type: none"> ① NR/NBR ② CR/EPDM
Schutzklasse	IP54
Temperaturbereich	<ul style="list-style-type: none"> ① -40 °C bis +90 °C ② -30 °C bis +120 °C




material	brass nickel-plated
screws	stainless steel
sealing ring	<ul style="list-style-type: none"> ① NR/NBR ② CR/EPDM
protection class	IP54
range of temperature	<ul style="list-style-type: none"> ① -40 °C to +90 °C ② -30 °C to +120 °C

Gewinde thread		Dichtring sealing ring	SW1	SW2	H	L		Bestell-Nr. ref.-number
----------------	--	------------------------	-----	-----	---	---	--	-------------------------

kurzes Anschlussgewinde / short connection thread

M 12 x 1,5	5 – 6	S	②	16	14	22	5	50	176.1200.0
M 16 x 1,5	6,5 – 10	UNI	②	19	18	23	5	50	176.1600.7
M 20 x 1,5	7,5 – 11,5	UNI	①	22	22	26	6	50	174.2011.6
M 20 x 1,5	8,5 – 14	UNI	②	24	22	27	6	50	176.2000.7
M 20 x 1,5	10,5 – 14,5	UNI	①	27	24	28	6	50	174.2016.6
M 25 x 1,5	12 – 18	UNI	②	34	27	32	7	25	176.2500.7
M 32 x 1,5	16 – 25	UNI	②	42	34	35	8	20	176.3200.7
M 40 x 1,5	22 – 33	UNI	②	52	42	40	8	10	176.4000.7
M 40 x 1,5	25,5 – 34	UNI	①	52	50	42	8	10	174.4036.6
M 50 x 1,5	31 – 40	UNI	①	59	57	44	9	5	174.5042.6
M 63 x 1,5	35 – 46	UNI	①	68	66	45	10	5	174.6348.6

Pg 7	5 – 6	S	②	16	14	22	5	50	174.0700.0
Pg 9	6,5 – 10	UNI	①	19	17	23	6	50	174.0900.6
Pg 11	7,5 – 11,5	UNI	①	22	20	26	6	50	174.1100.6
Pg 13,5	8,5 – 13,5	UNI	①	24	22	27	6,5	50	174.1300.6
Pg 16	10,5 – 16	UNI	①	27	24	28	6,5	50	174.1600.6
Pg 21	12 – 20	UNI	①	34	30	31	7	25	174.2100.6
Pg 29	18 – 27	UNI	①	42	40	34	8	20	174.2900.6
Pg 36	25,5 – 34	UNI	①	52	50	42	9	10	174.3600.6
Pg 42	31 – 40	UNI	①	59	57	44	10	5	174.4200.6
Pg 48	35 – 46	UNI	①	68	64	49	10	5	174.4800.6

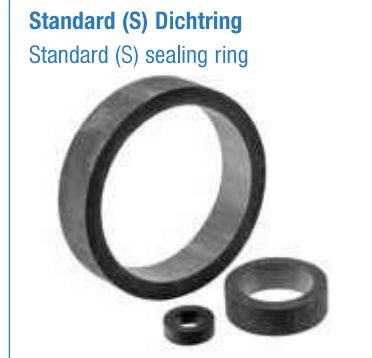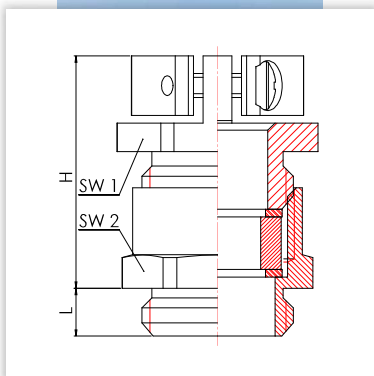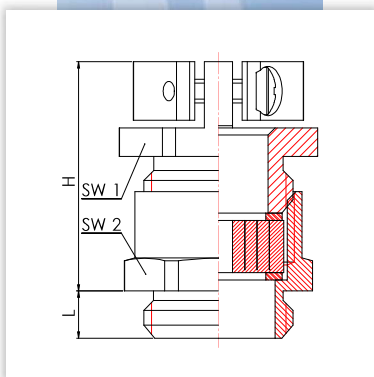

Zentrische Zugentlastung

Centric strain relief