

# OFFICE CONTAINER


www.module-t.com

- **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- **Wall:** polyurethane or rockwool insulated sandwich panels exterior and interior walls.
- **Insulation thickness:** 50mm,60mm,80mm or 100mm.
- **Ceiling :** 80mm polyurethane insulated ceiling.
- **Flooring:** 03mm PVC flooring (optional: parquet or ceramic tile).
- **Door and Window Joinery:** Aluminum or PVC windows (optional: large window, bay window, aluminum or PVC shutters, blinds, steel railings for windows and doors). Lighting and Electrical Equipment are ncluded.
- **Internal Arrangement (optional):** air conditioning, furniture, data sockets.
- **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.

20 FEET



10 FEET

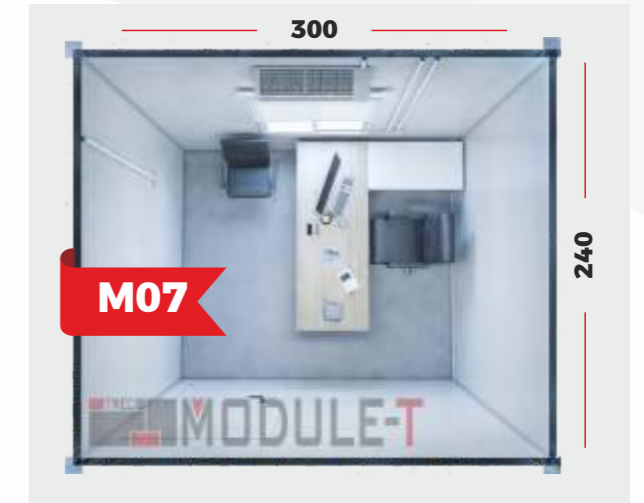


## Delivery in a Special Package:



up to 10 pcs of M01/M02 are delivered in a special package with a 40 High Cube shipping container.

Fully Equipped

Modular Office Solutions

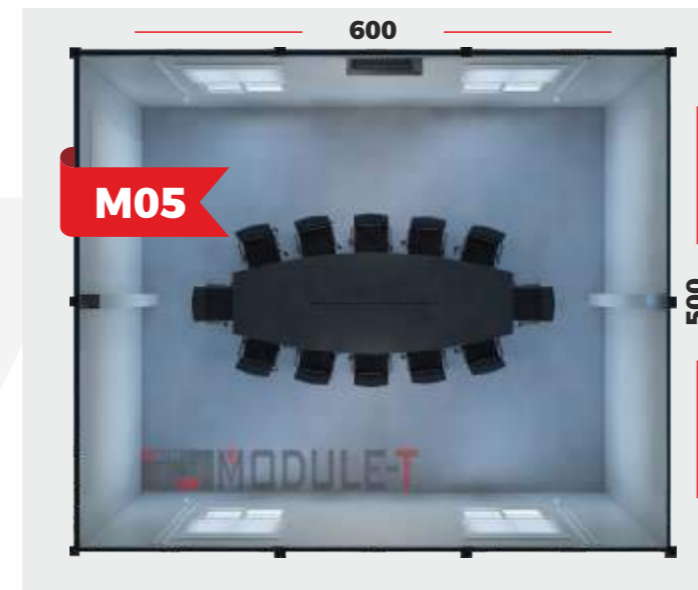

40 FEET

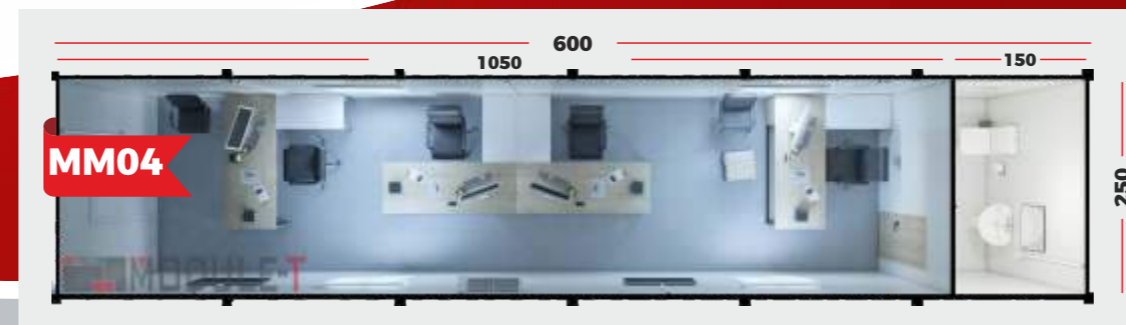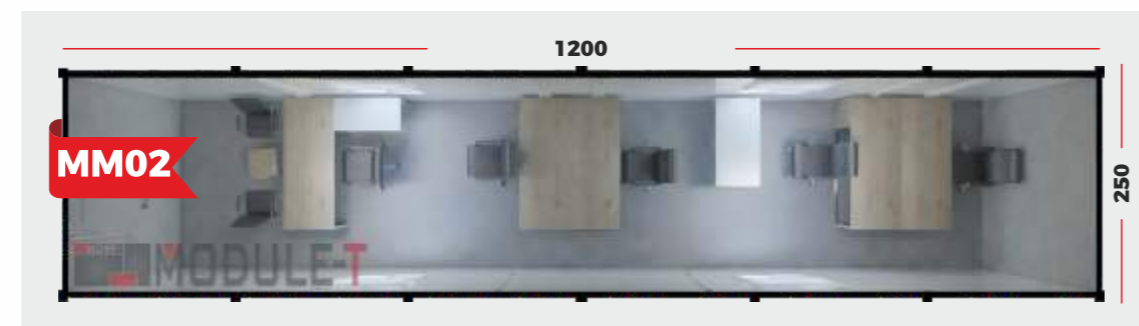

# LOCKER CONTAINER

## Technical Specifications




- ▣ **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- ▣ **Wall:** polyurethane or rockwool insulated sandwich panels exterior and interior walls. Insulation thickness: **40mm,50mm,60mm,80mm or 100mm.**
- ▣ **Ceiling:** 40mm or 80mm polyurethane insulated ceiling.
- ▣ **Flooring:** 18mm fibercement panel surface + 03mm PVC flooring. Optional: ceramic tile or steel sheet floor covering.
- ▣ **Door and Window Joinery:** Aluminum or PVC windows and doors, window and door protection steel bar (optional).
- ▣ **Lighting and Electrical Equipment are included.**
- ▣ **Sanitary equipment:** Ceramic hand wash 37x45cm, Acrylic shower tray 102x92cm, ceramic wc. Option: stainless wc and hand wash, **cubicle compact laminate wc and shower cabins.**
- ▣ **Furnitures(Optional) :** Steel Lockers and bench.
- ▣ **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- ▣ **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.



**Fully Equipped**

Locker Prefabricated Containers

**20 FEET**

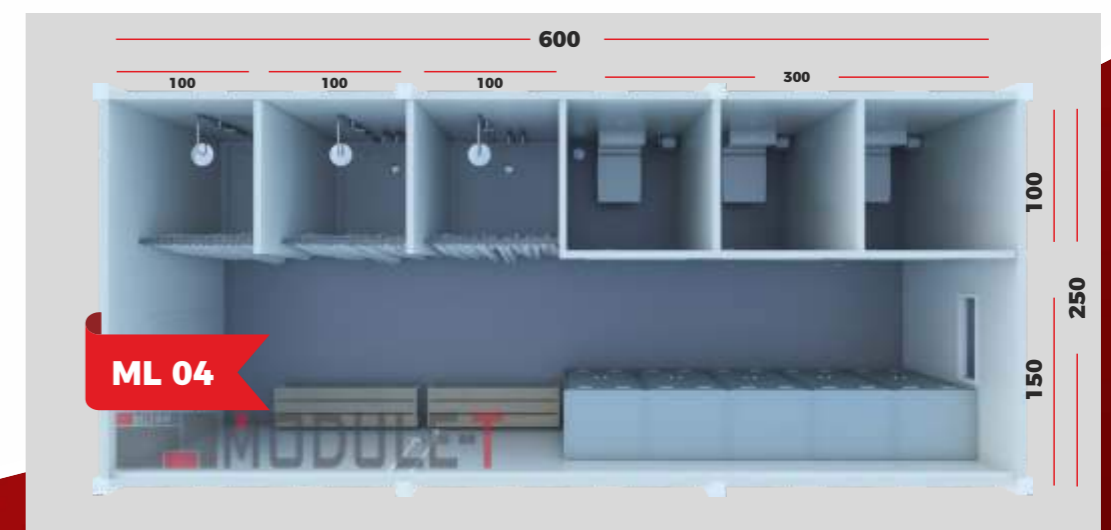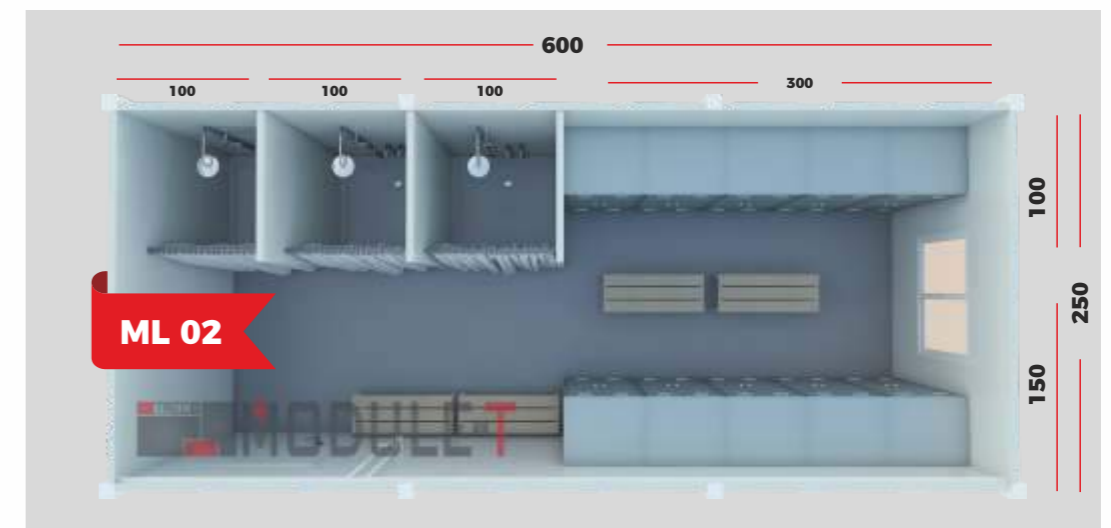
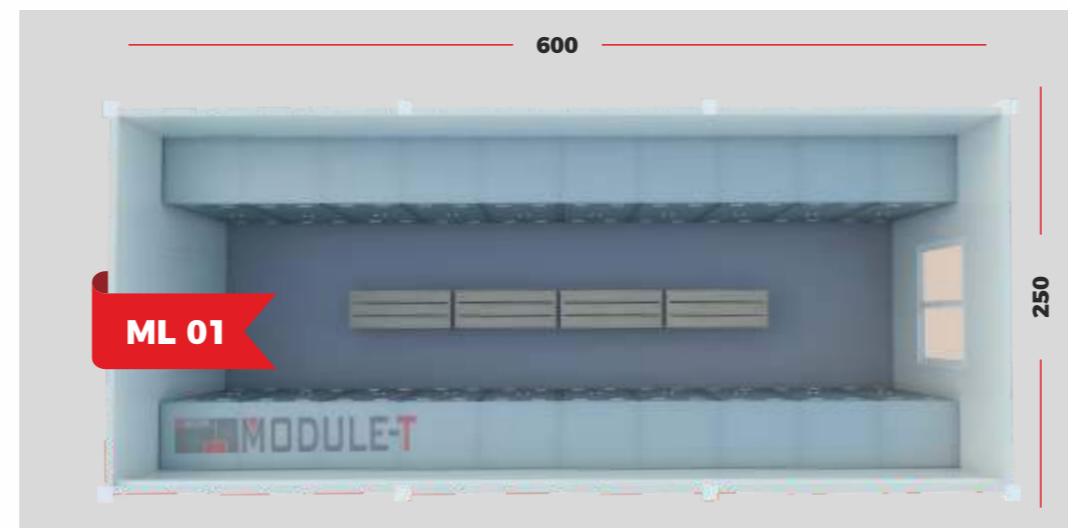


# SANITARY CONTAINER



## WC & SHOWER CABINS

### Technical Specifications

- ▣ **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- ▣ **Wall:** polyurethane or rockwool insulated sandwich panels exterior and interior walls. Insulation thickness: **40mm, 50mm, 60mm, 80mm or 100mm.**
- ▣ **Ceiling:** 40mm or 80mm polyurethane insulated ceiling.
- ▣ **Flooring:** 18mm fibercement panel surface + 03mm PVC flooring. Optional: ceramic tile or steel sheet floor covering.
- ▣ **Door and Window Joinery:** Aluminum or PVC windows and doors, window and door protection steel bar (optional).
- ▣ **Lighting and Electrical Equipment are included.**
- ▣ **Sanitary equipment:** Ceramic hand wash 37x45cm, Acrylic shower tray 102x92cm, ceramic wc. Option: stainless wc and hand wash, cubicle compact laminate wc and shower cabins.
- ▣ **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- ▣ **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.

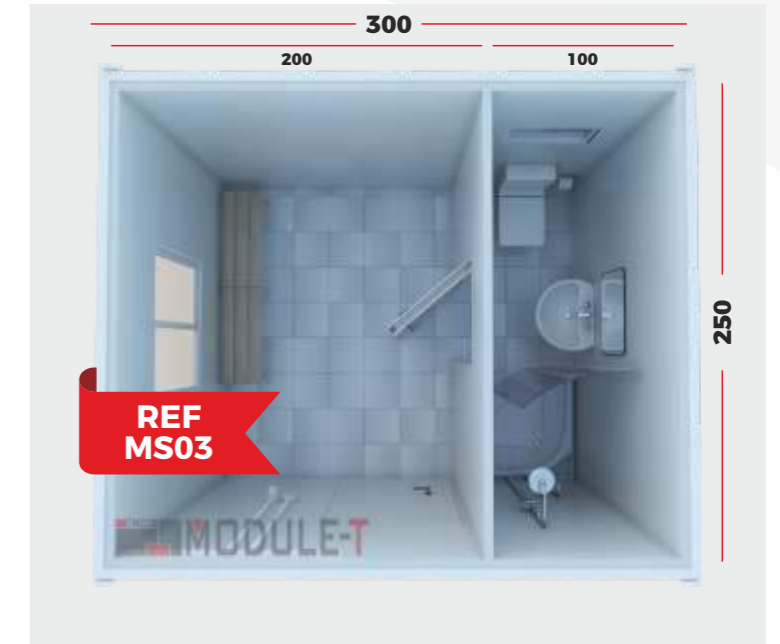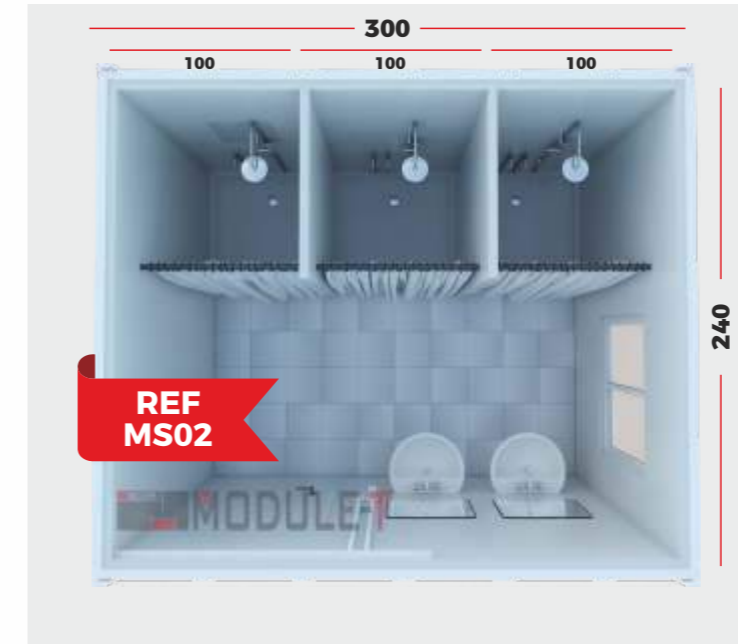

## 20 FEET

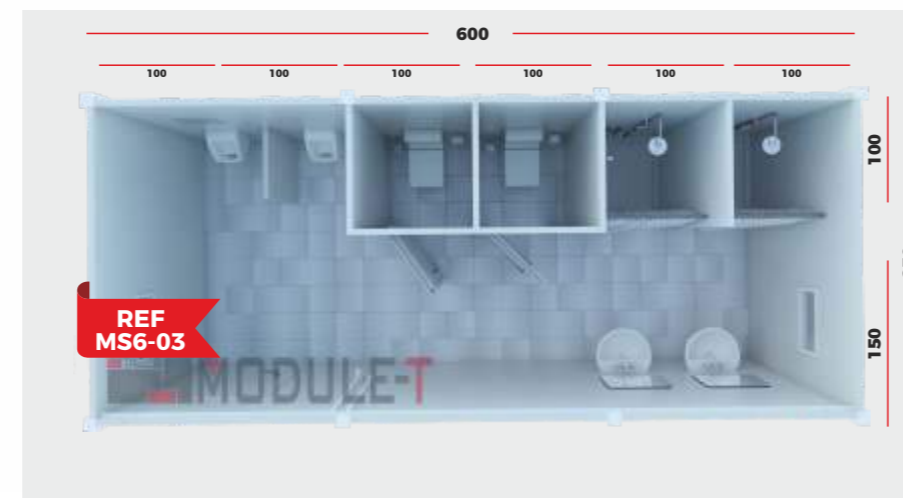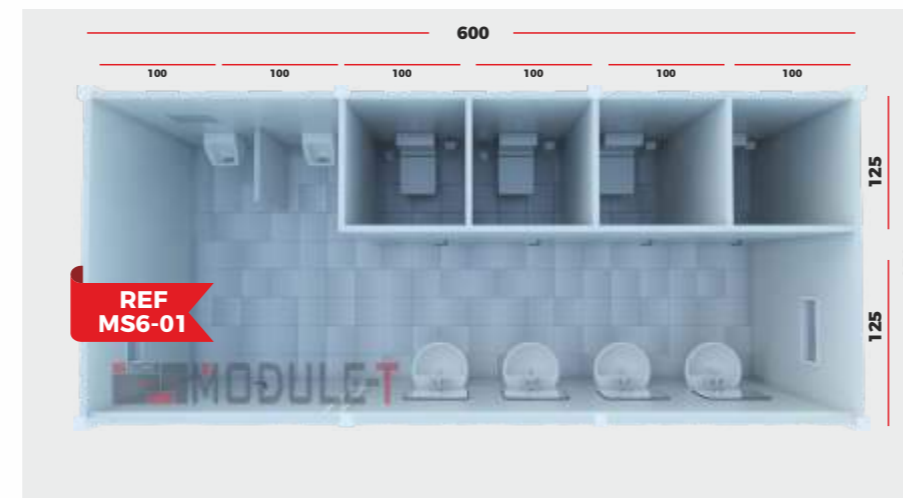


**Delivery in a Special Package:**  
up to 08 pcs of fully equipped sanitary container are delivered in a special package with a 40 High Cube shipping container.



# ACCOMMODATION CONTAINER

## Technical Specifications

- ▣ **Structure:** high galvanized and painted steel sandwich panel surface and frame.
- ▣ **Wall: polyurethane, rockwool or expanded polystyrene foam** insulated sandwich panels exterior and interior walls. Wall thickness: **50mm, 60mm, 80mm or 100mm.**
- ▣ **Ceiling:** 40mm or 80mm polyurethane insulated ceiling.
- ▣ **Flooring:** 18mm fibercement panel surface + 03mm PVC flooring. Optional: parquet or ceramic tile. Optional: 50mm or 100mm rockwool floor chassis insulation.
- ▣ **Door and Window Joinery:** Aluminum or PVC windows and doors, window and door protection steel bar (optional).
- ▣ **Lighting (IP65) and Electrical Equipment are included**
- ▣ **Sanitary equipment:** Ceramic hand wash 37x45cm, Acrylic shower tray 102x92cm, ceramic wc. Option: **stainless wc and hand wash, cubicle compact laminate wc and shower cabins**
- ▣ **Internal Arrangement (optional):** air conditioning, furniture (steel locker and bench).
- ▣ **Connection Set (optional):** a connection set is provided to be joined together or to facilitate overlapping.
- ▣ **Additional Roofing (optional):** galvanized trapezoidal roof or polyurethane insulated sandwich panel additional roof covering.

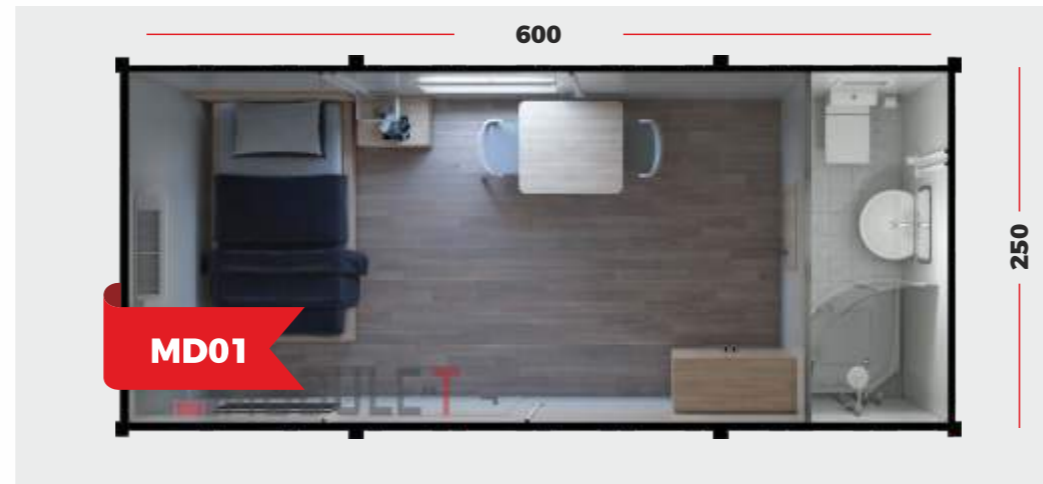

20 FEET

**Fully Equipped**  
**Modular Accommodation Container**



40 FEET

