



**Heavy-duty ball transfer with press-fit or threaded bolts**



- all load-carrying capacity specifications are valid also for overhead installations
- the performance of our ball transfer units is optimized when they are used properly. Installation, load, and spacing accuracy are crucial for achieving optimal operating efficiency. In addition, the surfaces that come into contact with the ball transfer units must be hardened
- if it is difficult to adequately meet these requirements because of the conditions at the place of installation, then we recommend that a safety factor be incorporated into the calculation of the required quantity and performance

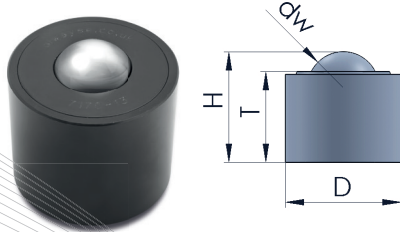

ball transfer series KR-OT	dw mm	D mm	H mm	T mm	load-carrying capacity kg
KR-OT-13 Ident No.: 0022451	12.7	20.6	19.6	16.1	35
KR-OT-25-135 Ident No.: 0022452	25.4	44.5	41.4	35.8	135
KR-OT-25-320 Ident No.: 0022453	25.4	50.8	44.7	38.6	320
KR-OT-38 Ident No.: 0022454	38.1	60	61.5	48.5	1,000
KR-OT-50 Ident No.: 0022455	50.8	101.6	98.4	84.1	2,000

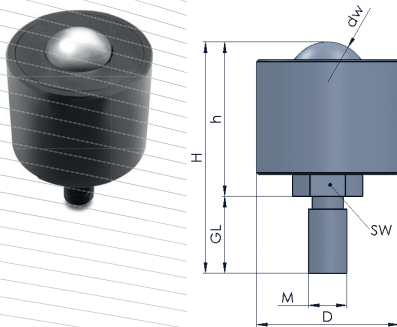

ball transfer series KR-OTG	dw mm	D mm	H mm	h mm	GL mm	thread	load-carrying capacity kg
KR-OTG-13* Ident No.: 0022469	12.7	20.6	35.8	19.6	16.2	M8	35
KR-OTG-25-135 Ident No.: 0022470	25.4	44.5	72.4	48.3	24.1	M12	135
KR-OTG-25-320 Ident No.: 0022471	25.4	50.8	77	51.3	25.7	M12	320
KR-OTG-38 Ident No.: 0022472	38.1	60	114.3	60.7	40.8	M20	1,000
KR-OTG-50 Ident No.: 0022473	50.8	101.6	159	109.1	49.9	M24	2,000

\* without a key length on the thread tap