### **Automatic Shrink Wrap Machines|Sleeve Sealer**

Automatic Sleeve Shrink Wrap Machine is made to wrap heavy products with thick film. The finished packaging has two open ends on each side which are referred to as "bullseyes". Standard products packaged with a shrink bundling machine include firewood, canned goods, cases of water bottles, metal products, tool cases, and more. The machine can carry out two-row, three-row, four-row shrink packaging with or without bottom support, like 10 bottles  $(1 \times 10)$ ,  $(2 \times 5)$ , 9 bottles  $(3 \times 3)$ , 12 bottles  $(3 \times 4)$ , 15 bottles  $(3 \times 5)$ , 24 bottles  $(4 \times 6)$ .


#### **Recommended Models Information:**

WE-600A (WE-750A) for bottles









WE-600B(WE-750B) for carton, include stacker



WE-600C(WE-750C) for Cylinder product



# WE-600E(WE-750E) for Carton with Turn-over palletizer



WE-750D for Carton with earhook



## WE-800A for product without base










WE-800B for product with base

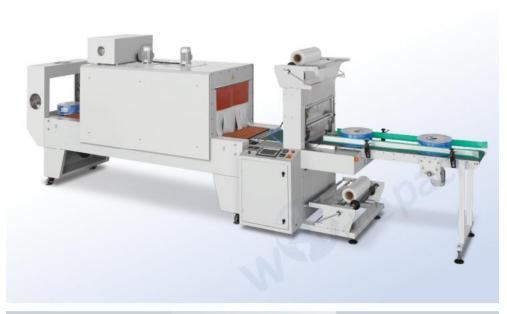







# WE-800E for flooring, square pipe and other longer products



Model	WE-600A	WE-750A
Sealing type	Sleeve sealing	
Power supply	380V/50-60Hz/3phase	
Speed	10-20packers/min	6-18packers/min
Product size max	280*180*150mm	380*200*200mm
Film size max	350*280mm	500*280mm
Film type	polyethylene(PE)film	
Tunnel oven size	1040*355*220mm	1250*520*280mm
Power	Max 8KW	Max 12KW
Air compressor	≤0.5MPa(5bar)	
Gross Weight	600kg	700kg
Working height	850-900mm	
Sealing system	Special durable alloyed sealing knife with anti-stick Teflon coats	
Conveyor	Steel or Telfon mesh conveyor ,speed variable	
Machine material	Stainless steel	
Operating panel	Siemens touch screen,PLC,OMRON temperature controller	

Model	WE-800A	WE-800E
Sealing type	Sleeve sealing	Bottom lap sealing
Power supply	380V/50-60Hz/3phase	
Speed	8-18packers/min	Depends on product length
Product size max	420*300*300mm	width+height≤400mm H≤200mm
Film size max	600(width)*280mm	1000(width)*280mm
Film type	polyethylene(PE)film	
Tunnel oven size	1800*600*400mm	
Power	Max 20.5KW	Max 22KW
Air compressor	≤0.5MPa(5bar)	
Gross Weight	1050kg	1200kg
Working height	850-900mm	
Sealing system	Durable"U"shape alloyed sealing knife with Teflon tube	
Conveyor	Chains with silicon coated rods ,speed variable	
Machine material	Carbon steel	
Operating panel	Siemens touch screen, PLC, OMRON temperature controller	

#### **Equipment Feature:**

- 1. Adopt "Siemens" "PLC" program controller to realize the integration of machine, electricity and gas.
- 2. Using worm gear reducer, products feeding and film feeding smooth without jitter.
- 3. Specially designed sealing knife, the sealing line is firm, not cracked, and not easy to stick to the knife.
- 4. The frequency converter controls the transmission speed.
- 5. Adopts imported dual-transport fan motor, so that the hot air in the furnace cavity is evenly distributed, and the shrinking effect is more beautiful .Ultra-large air volume cooling system, the product is quickly cooled and shaped after heat shrinking.
- 6. The solid steel rod is used to cover the imported silicone tube, and the chain rod type conveying is durable. The feeding conveyor belt can be designed as left feeding or right feeding according to the needs of the site.
- 7. When packaging color film, it is necessary to add a color mark positioning system to accurately locate.

#### **Machine Details**



Control panel



Electrical box



Feed Shaper (WE-800E)



Feeding device(WE-600A)



Feeding device(WE-750C)



Pusher



Silicon coated rods





Stacking Palletizer





Turn over palletizer

## Drawing:







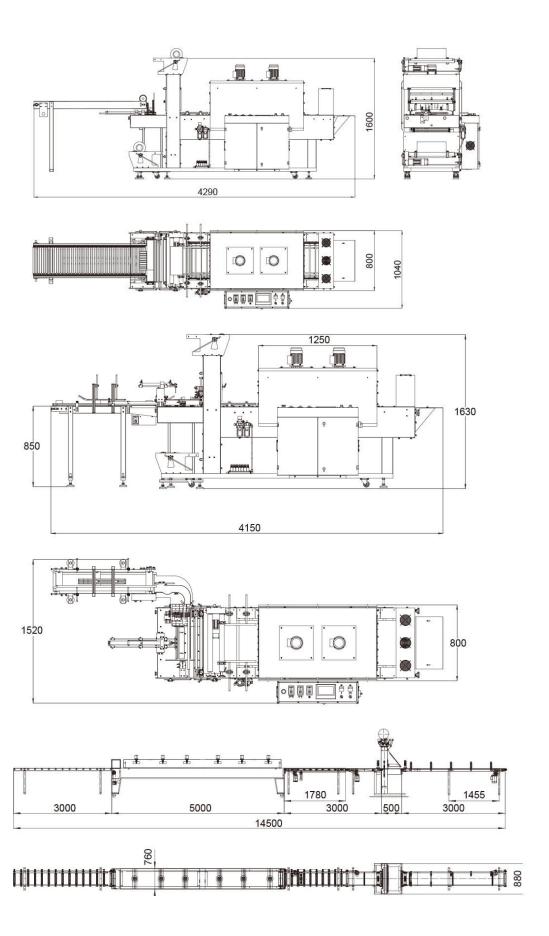

#### Video:

https://www.youtube.com/embed/OYUr93HTcAA

https://www.youtube.com/embed/-FTcK7iRBHA

https://www.youtube.com/embed/Zi UoUy6Fzw

https://www.youtube.com/embed/vRFwr98nC5s

#### Installation Service

- 1.We provide videos and instruction manual to show the process of installation.
- 2.We provide training for installation for free in our factory.
- 3.We can send technician to buyer's factory to install the machine and provide trainning course.

#### **After Sales Service**

- 1. One year warranty and free lifetime technique support.
- 2. Free spare parts would be supplied if machine broken within warranty period.
- 3.After the warranty period, the spare parts for replacement are offered based on certain charge.

Similar products: Automatic Rotary Premade Pouch Packaging Machine

(Link the main Automatic Rotary Premade Pouch Packaging Machine website)