




GEDA[®]
ORIGINAL



- ▷ Innovations
- ▷ Know-how
- ▷ Up-to-date production technologies



GEDA[®]
ORIGINAL

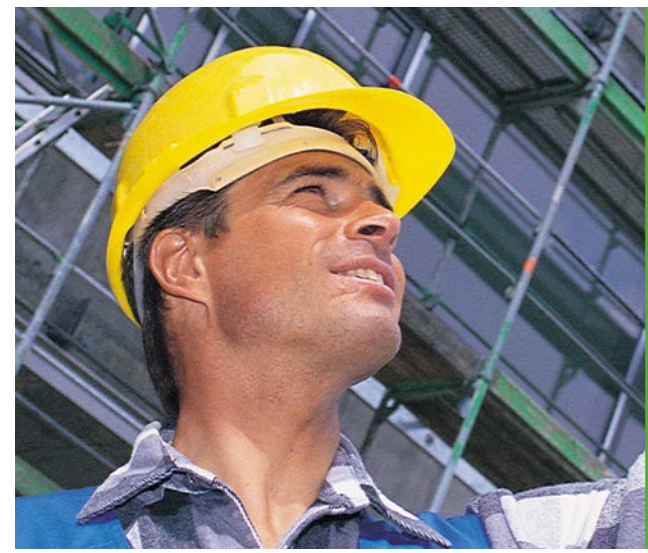

GEDA[®]
World-wide competence



GEDA[®]
Mini 60 S
Maxi 120 S
Maxi 150 S

Your dealer:

Empty rectangular box for listing a dealer.

GEDA[®]
ORIGINAL

**GEDA-Dechentreiter
GmbH & Co. KG**

Mertinger Straße 60
86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de

GEDA®
ROPE HOISTS
 Mini 60 S
 Maxi 120 S
 Maxi 150 S

Ideal for scaffolders,
 decorators and facade
 fabricators!

The quick and safe hoist
 for transporting material on a scaffold.



► **Technical data**

GEDA Mini 60 S

Load capacity 60 kg
Lifting height 40/70 m
Rope length 51/81 m
Electrical 0,25/0,75 kW/
power supply 230 V/50 Hz
Lifting speed 23/69 m/min.

GEDA Maxi 120 S

Load capacity 120 kg
Lifting height 40/70 m
Rope length 51/81 m
Electrical 0,45/1,35 kW/
power supply 230 V/50 Hz
Lifting speed 20/60 m/min.

GEDA Maxi 150 S

Load capacity 150 kg
Lifting height 40/70 m
Rope length 51/81 m
Electrical 0,45/1,35 kW/
power supply 230 V/50 Hz
Lifting speed 15/45 m/min.



The handy helper for scaffolding

GEDA scaffold hoists offer great advantages primarily thanks to **quick assembly** and **rapid conversion**. The handy rope drum drive is easily secured at the bottom of the scaffold while the lightweight swivel arm is attached at the top of the scaffold at the desired height. The maximum working height is 40 m, reaching up to 76 m when the winch is set higher.



► **Safety**

- 1 Easy placement of the rope on the swivel arm without having to dismantle the rollers
- 2 The motor stops when the rope slackens; the rope remains tight on the drum
- 3 An integrated limit switch turns it off on reaching the swivel arm, when overloaded or caught on the scaffold

Numerous load carrying devices ...

... make it easy to transport scaffold components/parts, as well as decorator supplies and insulating materials.