


## M25多孔接头

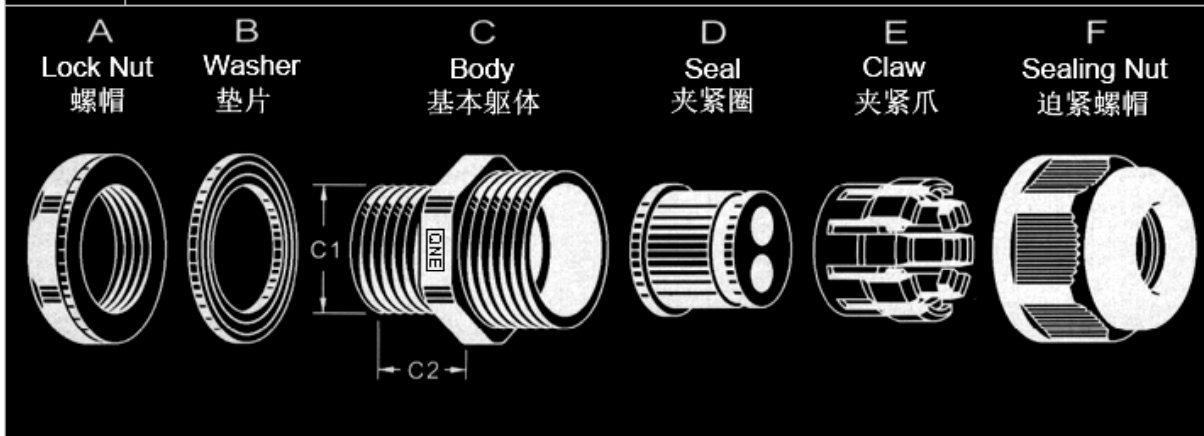

### Product Name: Plain screwed adaptor

螺牙规格	公制牙
Screw specification	Metric
产品材质	部分以UL认可之尼龙PA66制成（防火等级UL94V-2）,部分采用EPDM耐候橡胶制成
Product material	The part is made of UL-approved nylon PA66 (Flame calss UL94-V-2),B and D is made of EPDM weathering rubber
颜色种类	黑色及灰色
Colour Type	Black and grey
保护等级	IP67
Degree of protection	
工作温度	-40℃-100℃
Working temperature	
产品特性	特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水，防尘，抗盐，耐弱酸，酒精，油，油脂及一般溶剂
Product feature	Special clamping jaw and clamping ring design,large clamping cable range,strong tensile strength,waterproof,dustproof,salt resistant,weak acid,alcohol,oil,grease and general solvent

产品名称: **多孔及扁孔型电缆固定头**


标准螺牙 Standard screw	线缆范围 Cable area mm	螺纹外径 Thread O.D. mm	螺纹长度 Thread length mm	扳手尺寸 螺母/螺 帽 Spanner size nut / nuts
PG7A-H2-3	1.2-3	12.5	8.5	17/19
PG7A-H3-2.6	1.2-2.6	12.5	8.5	17/19
PG7A-H4-2.3	1-2.3	12.5	8.5	17/19
PG9A-H2-3	1.2-3	15.2	8.5	22/19
PG9A-H3-2.6	1.2-2.6	15.2	8.5	22/19
PG9A-H4-2.3	1-2.3	15.2	8.5	22/19
PG11-H2-4	1.6-4	18.6	10	24/22
PG11A-H2-4	1.6-4	18.6	10	24/22
PG11A-H3-4	1.6-4	18.6	10	24/22
PG11A-H4-3.2	1.5-3.2	18.6	10	24/22
PG11A-H6-2.1	1.4-2.1	18.6	10	24/22
PG13.5-H2-5.3	3-5.3	20.4	10	27/24
PG13.5A-H2-5.3	3-5.3	20.4	10	27/24
PG13.5A-H3-5	43501	20.4	10	27/24
PG13.5A-H4-4	43500	20.4	10	27/24
PG16-H2-6	2.5-6	22.5	10.8	30/27
PG16-H4-5.5	3-5.5	22.5	10.8	30/27
PG16A-H2-6	2.5-6	22.5	10.8	30/27
PG16A-H2 大小孔 Hole size	6mm*1 3mm*1	22.5	10.8	30/27
PG16A-H3-5	2-5	22.5	10.8	30/27
PG16A-H4-2.5	1-2.5	22.5	10.8	30/27
PG16A-H4-3.5	1.5-3.5	22.5	10.8	30/27
PG16A-H4-4.5	2-4.5	22.5	10.8	30/27
PG16A-H5-3	1.5-3.0	22.5	10.8	30/27
PG21-H2-6	2.5-6	28.3	12	36/33
PG21A-H2-6.5	3-6.5	28.3	12	36/33

PG21A-H2-8	4-8	28.3	12	36/33
PG21A-H3-5	2-5	28.3	12	36/33
PG21A-H3-8	4-8	28.3	12	36/33
PG21A-H4-5	3.5-5	28.3	12	36/33
PG21A-H4-6	4-6	28.3	12	36/33
PG21A-H4-7	5-7	28.3	12	36/33
PG21A-H5-6	3-6	28.3	12	36/33
PG21-H6-5.3	2.4-5.3	28.3	12	36/33
PG21A-H6-5.3	2.4-5.3	28.3	12	36/33
PG21A-H7-4.3	3-4.3	28.3	12	36/33
PG29A-H2-10	5-10	37	15	46/41
PG29A-H3-10	5-10	37	15	46/41
PG29A-H3 大小孔Hole size	5mm*2 10mm*1	37	15	46/41
PG29A-H3 大小孔Hole size	8.5mm*2 11mm*1	37	15	46/41
PG29A-H4-7	5-7	37	15	46/41
PG29A-H4-9	4.5-9	37	15	46/41
PG29A-H5-8	4-8	37	15	46/41
PG29A-H6-5.5	3.0-5.5	37	15	46/41
PG29A-H6-7	3.5-7	37	15	46/41
PG36A-H4-12	10-12mm	47	15	57/50
PG36A-H4 大小孔Hole size	8-9.5mm*1 10-11mm*3	47	15	57/50
PG36A-H4 大小孔Hole size	8-9.5mm*2 10-11mm*2	47	15	57/50

MG12A-H2-3	1.2-3		12	8.5	18/19
MG12A-H3-2.6	1.2-2.6		12	8.5	18/19
MG12A-H4-2.3	1-2.3		12	8.5	18/19
M16-H2-4	1.6-4		16	10	22/22
MG16A-H2-4	1.6-4		16	10	22/22
MG16A-H3-4	1.6-4		16	15	22/22
MG16A-H4-3.2	1.5-3.2		16	15	22/22
MG16A-H6-2.1	1.4-2.1		16	15	22/22
M16L-H2-4	1.6-4		16	15	22/22
M18-H2-4	1.6-4		18	10	24/22
M18L-H2-4	1.6-4		18	15	24/22
M20S-H2-5.3	1.5-5.3		20	10	27/24
M20-H2-6	2.5-6		20	10	27/27
M20-H4-5.5	3-5.5		20	10	27/27
MG20A-H2-6	2.5-6		20	15	27/27
MG20A-H2 大小孔Hole size	6mm*1 3mm*1		20	15	27/27
MG20A-H3-5	2-5		20	15	27/27
MG20A-H4-2.5	1-2.5		20	15	27/27
MG20A-H4-3.5	1.5-3.5		20	15	27/27
MG20A-H4-4.5	2-4.5		20	15	27/27

MG20A-H5-3	1.5-3.0	20	15	27/27
M20L-H2-6	2.5-6	20	15	27/27
M20L-H4-5.5	3-5.5	20	15	27/27
MG22A-H2-6	2.5-6	22	10	29/27
MG22A-H3-5	2-5	22	10	29/27
MG22A-H4-2.5	1-2.5	22	10	29/27
MG22A-H4-3.5	1.5-3.5	22	10	29/27
MG22A-H4-4.5	2-4.5	22	10	29/27
M25S-H2-6	2.5-6	25	10	33/27
M25S-H4-5.5	3-5.5	25	10	33/27
M25-H2-6	2.5-6	25	10	33/33
M25L-H2-6	2.5-6	25	15	33/33
MG25A-H2-6.5	3-6.5	25	15	33/33
MG25A-H2-8	4-8	25	15	33/33
MG25A-H3-5	2-5	25	15	33/33
MG25A-H3-8	4-8	25	15	33/33
MG25A-H4-5	3.5-5	25	15	33/33
MG25A-H4-6	4-6	25	15	33/33
MG25A-H4-7	5-7	25	15	33/33
MG25A-H5-6-ST	3-6	25	15	33/33
MG25A-H5-6	3-6	25	15	33/33
M25-H6-5.3	2.4-5.3	25	10	33/33
M25L-H6-5.3	2.4-5.3	25	15	33/33
MG25A-H6-5.3-ST	2.4-5.3	25	10	33/33
MG25A-H6-5.3	2.4-5.3	25	15	33/33
MG25A-H7-4.3	3-4.3	25	15	33/33
MG32A-H2-10	43595	32	15	41/41
MG32A-H3-10	43595	32	15	41/41
MG32A -H3 大小孔Hole size	5mm*2 10mm*1	32	15	41/41
MG32A -H3 大小孔Hole size	8.5mm*2 11mm*1	32	15	41/41
MG32A-H4-7	5-7	32	15	41/41
MG32A-H4-9	4.5-9	32	15	41/41
MG32A-H5-8	4-8	32	15	41/41
MG32A-H6-5.5	3.0-5.5	32	15	41/41
MG32A-H6-7	3.5-7	32	15	41/41
MG40A-H4-12	10-12mm	40	20	50/50
MG40A -H4 大小孔Hole size	8-9.5mm*1 10-11mm*3	40	20	50/50
MG40A -H4 大小孔Hole size	8-9.5mm*2 10-11mm*2	40	20	50/50
MG63A-H3-13	10-13	63	25	75/78
G3/8-H2-4	1.6-4	16.662	10	22/22
G1/2-H2-5.3	3-5.3	20.955	10	27/24
G3/4-H2-6	2.5-6	26.441	12	33/33
G3/4-H6-5.3	2.4-5.3	26.441	12	33/33
NPT3/8-H2-4	1.6-4	16.662	10	22
NPT1/2-H2-5.3	3-5.3	20.955	10	27
NPT3/4-H2-6	2.5-6	26.441	15	33
NPT3/4-H6-5.3	2.4-5.3	26.441	15	33